
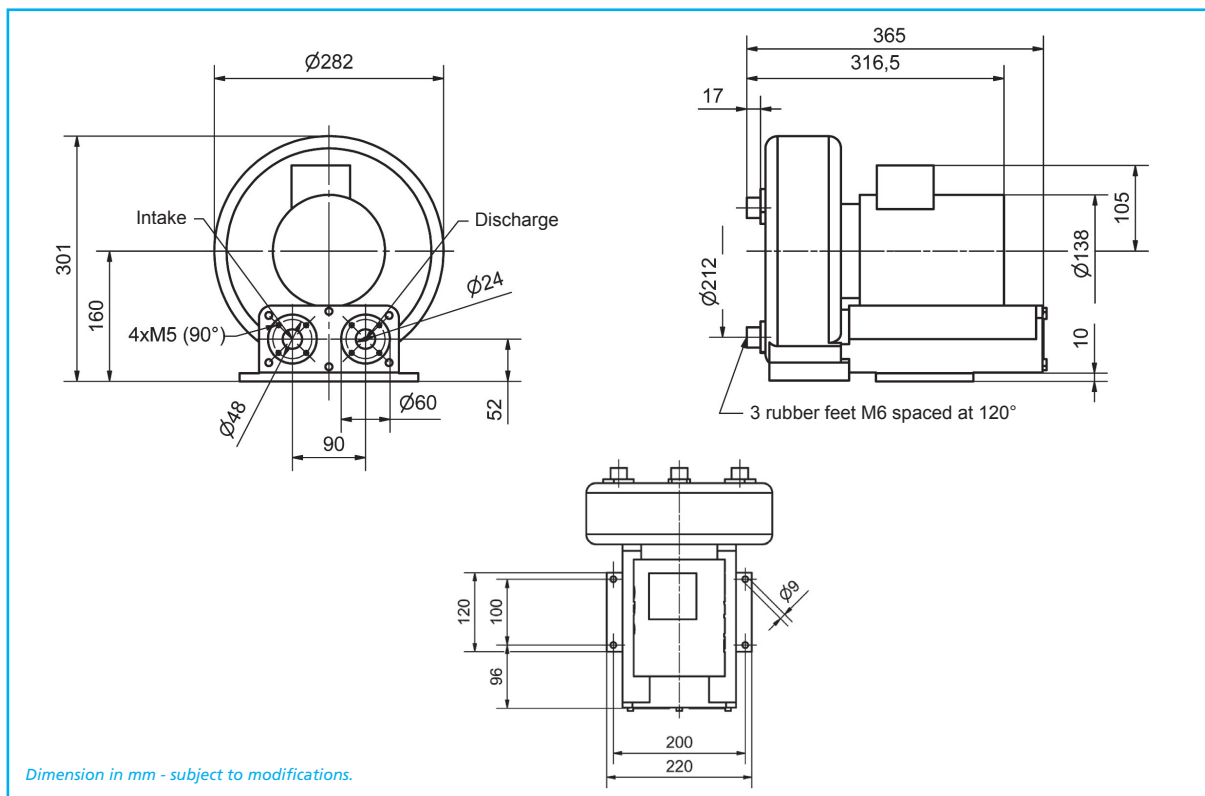



SD 3 VFD 3, SE 3 VFD 3S



Delivery includes inlet and outlet flanges NPT 3/4".


Type		Maximum performance when used as blower		Maximum performance when used as extractor		Motor ratings				Capacitor	Weight
	Frequency	$\dot{V}$ max	Δp_t max.	$\dot{V}$ max.	Δp_t max.	Rated output	Voltage	Current	RPM	230 V	
	Hz	SCFM	"WG	SCFM	"WG	hp	V	Amp.	min ⁻¹	µF/V	lb
SD 3 VFD 3	60	26	140	26	104	0,75	230/460	3,35/1,67	3520	-	37,5
SE 3 VFD 3	60	26	140	26	104	0,75	230	4,0	3430	16/450	37,5

Pressure

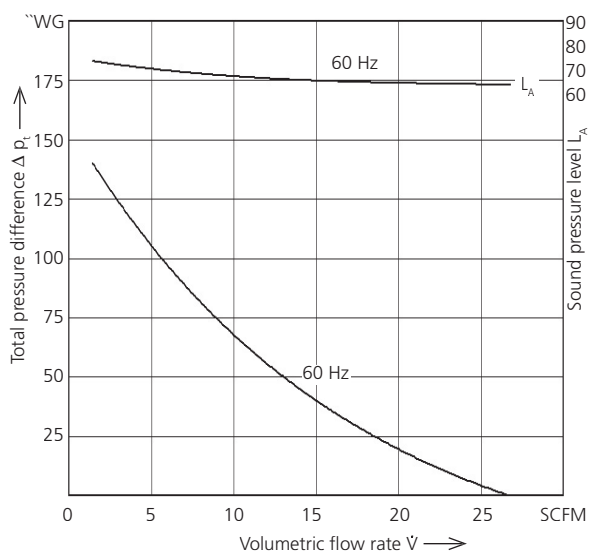

Technical and constructional subject to change.

Vacuum

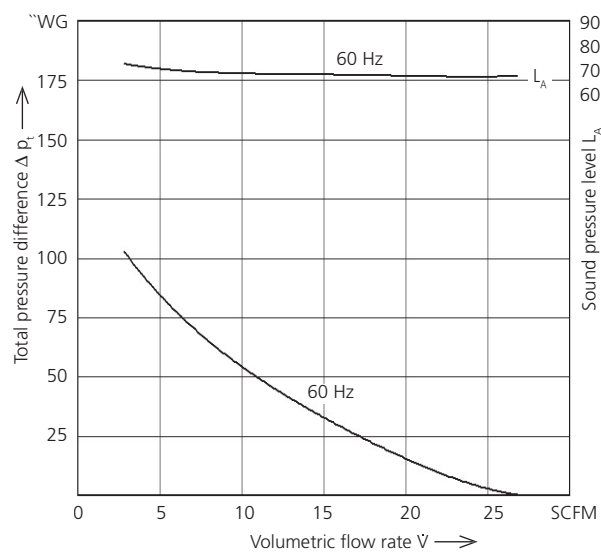

Elektor
airsystems gmbh

Richard-Hirschmann-Straße 12
73728 Esslingen/Neckar
Germany
sales@elektor.com
www.elektor.com



FUJI ELECTRIC CORPORATION OF AMERICA
Park 80 West Plaza II
USA-Saddle Brook, NJ 07663
fujidc@fecoa.fujielectric.com
www.fujielectric.com