


Uncontrolled Copy

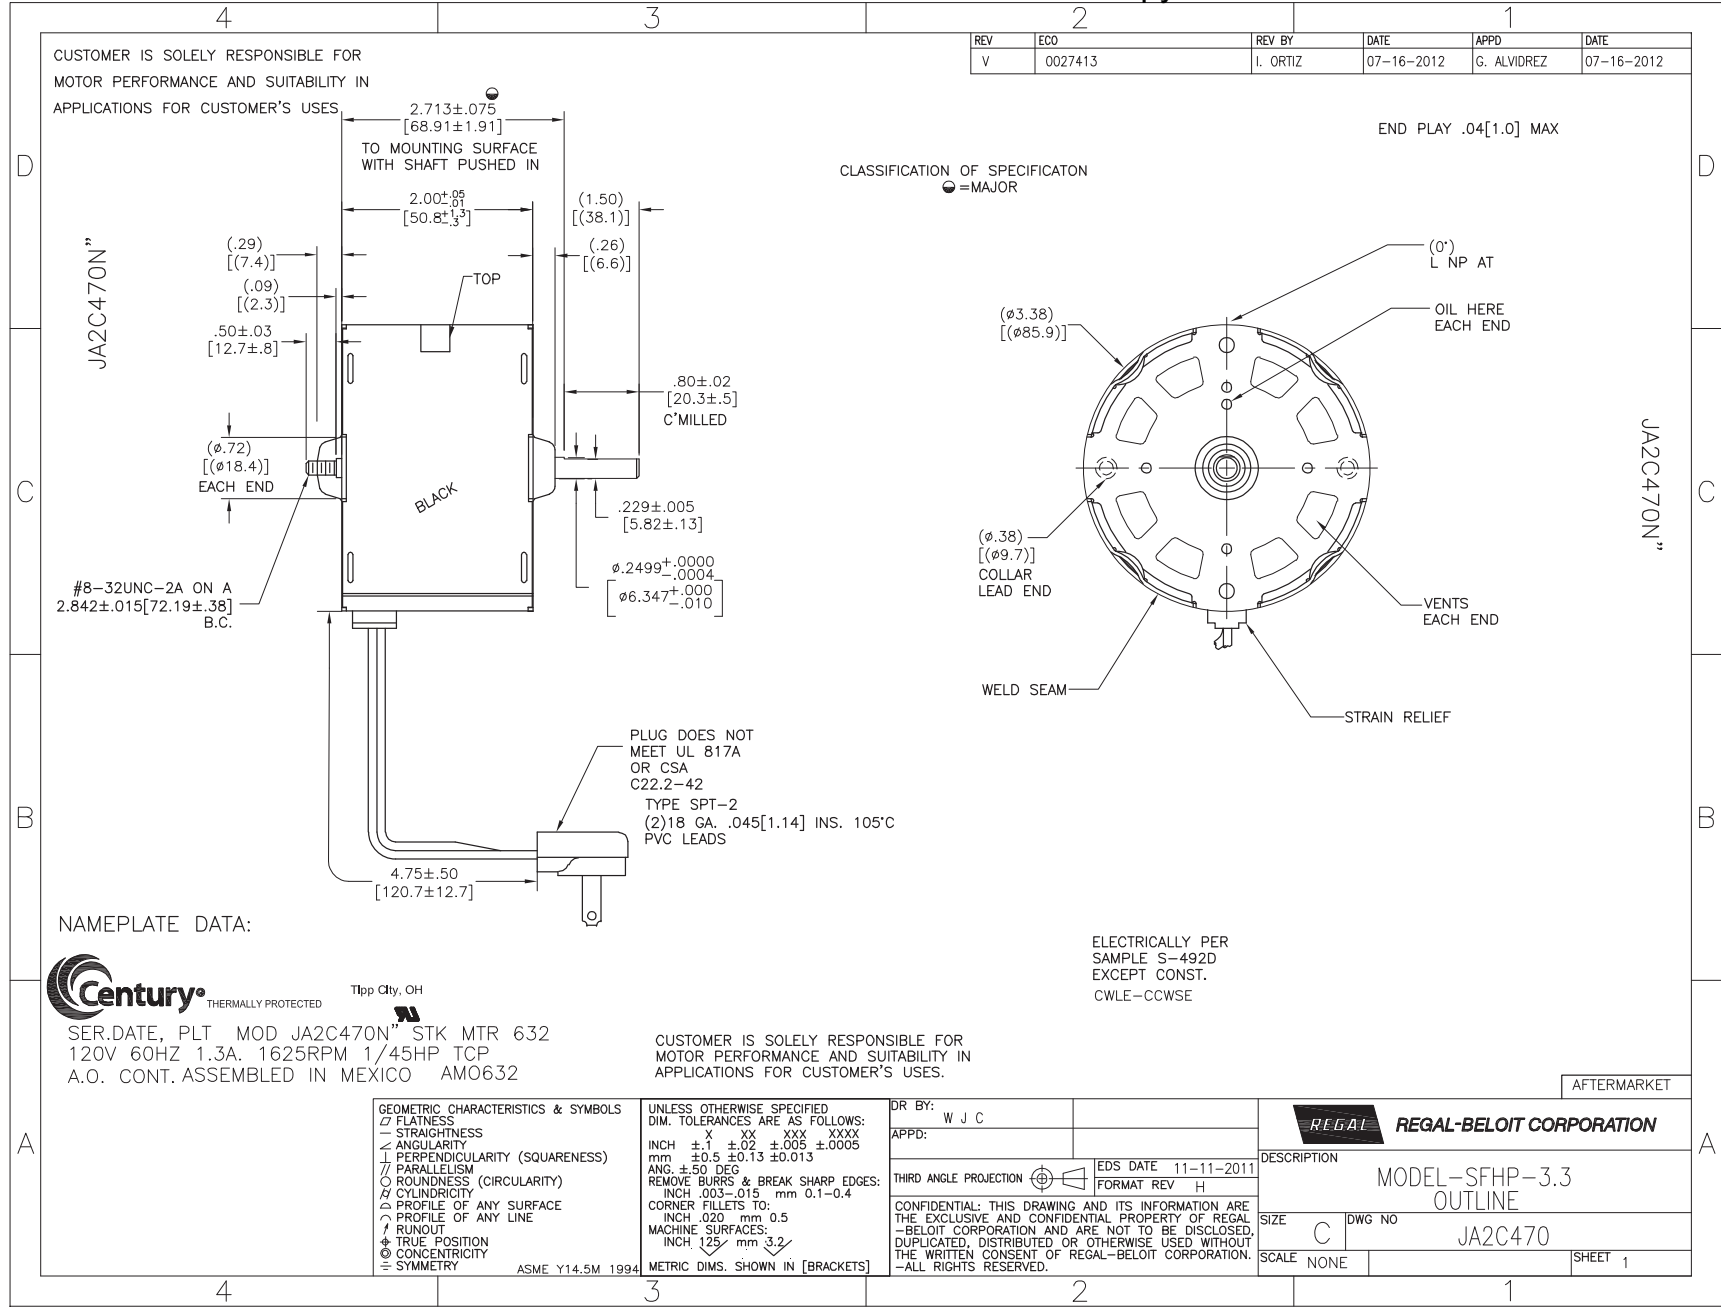

REV	ECO	REV BY	DATE	APPD	DATE
V	0027413	I. ORTIZ	07-16-2012	G. ALVIDREZ	07-16-2012

CUSTOMER IS SOLELY RESPONSIBLE FOR MOTOR PERFORMANCE AND SUITABILITY IN APPLICATIONS FOR CUSTOMER'S USES.

CLASSIFICATION OF SPECIFICATION
 ○ = MAJOR

END PLAY .04[1.0] MAX

JA2C470N

JA2C470N

#8-32UNC-2A ON A
 2.842±.015[72.19±.38]
 B.C.

PLUG DOES NOT MEET UL 817A OR CSA C22.2-42 TYPE SPT-2 (2)18 GA. .045[1.14] INS. 105°C PVC LEADS

ELECTRICALLY PER SAMPLE S-492D EXCEPT CONST. CWLE-CCWSE

NAMEPLATE DATA:

Century THERMALLY PROTECTED
 Tipp Cty, OH
 SER. DATE, PLT MOD JA2C470N STK MTR 632
 120V 60HZ 1.3A. 1625RPM 1/45HP TCP
 A.O. CONT. ASSEMBLED IN MEXICO AMO632

CUSTOMER IS SOLELY RESPONSIBLE FOR MOTOR PERFORMANCE AND SUITABILITY IN APPLICATIONS FOR CUSTOMER'S USES.

GEOMETRIC CHARACTERISTICS & SYMBOLS	
∥	FLATNESS
—	STRAIGHTNESS
∠	ANGULARITY
⊥	PERPENDICULARITY (SQUARENESS)
∥	PARALLELISM
○	ROUNDNESS (CIRCULARITY)
⊂	CYLINDRICITY
△	PROFILE OF ANY SURFACE
∧	PROFILE OF ANY LINE
↗	RUNOUT
⊕	TRUE POSITION
◎	CONCENTRICITY
≡	SYMMETRY

UNLESS OTHERWISE SPECIFIED DIM. TOLERANCES ARE AS FOLLOWS:
 INCH ±.1 ±.02 ±.005 ±.0005
 mm ±0.5 ±0.13 ±0.013
 ANG. ±.50 DEG
 REMOVE BURRS & BREAK SHARP EDGES:
 INCH .003-.015 mm 0.1-0.4
 CORNER FILLETS TO:
 INCH .020 mm 0.5
 MACHINE SURFACES:
 INCH 125 mm 3.2
 METRIC DIMS. SHOWN IN [BRACKETS]

DR BY: W J C	EDS DATE 11-11-2011
APPD:	FORMAT REV H
THIRD ANGLE PROJECTION	DESCRIPTION
CONFIDENTIAL: THIS DRAWING AND ITS INFORMATION ARE THE EXCLUSIVE AND CONFIDENTIAL PROPERTY OF REGAL-BELOIT CORPORATION AND ARE NOT TO BE DISCLOSED, DUPLICATED, DISTRIBUTED OR OTHERWISE USED WITHOUT THE WRITTEN CONSENT OF REGAL-BELOIT CORPORATION. -ALL RIGHTS RESERVED.	MODEL-SFHP-3.3 OUTLINE

REGAL REGAL-BELOIT CORPORATION	
SIZE C	DWG NO JA2C470
SCALE NONE	SHEET 1

AFTERMARKET