
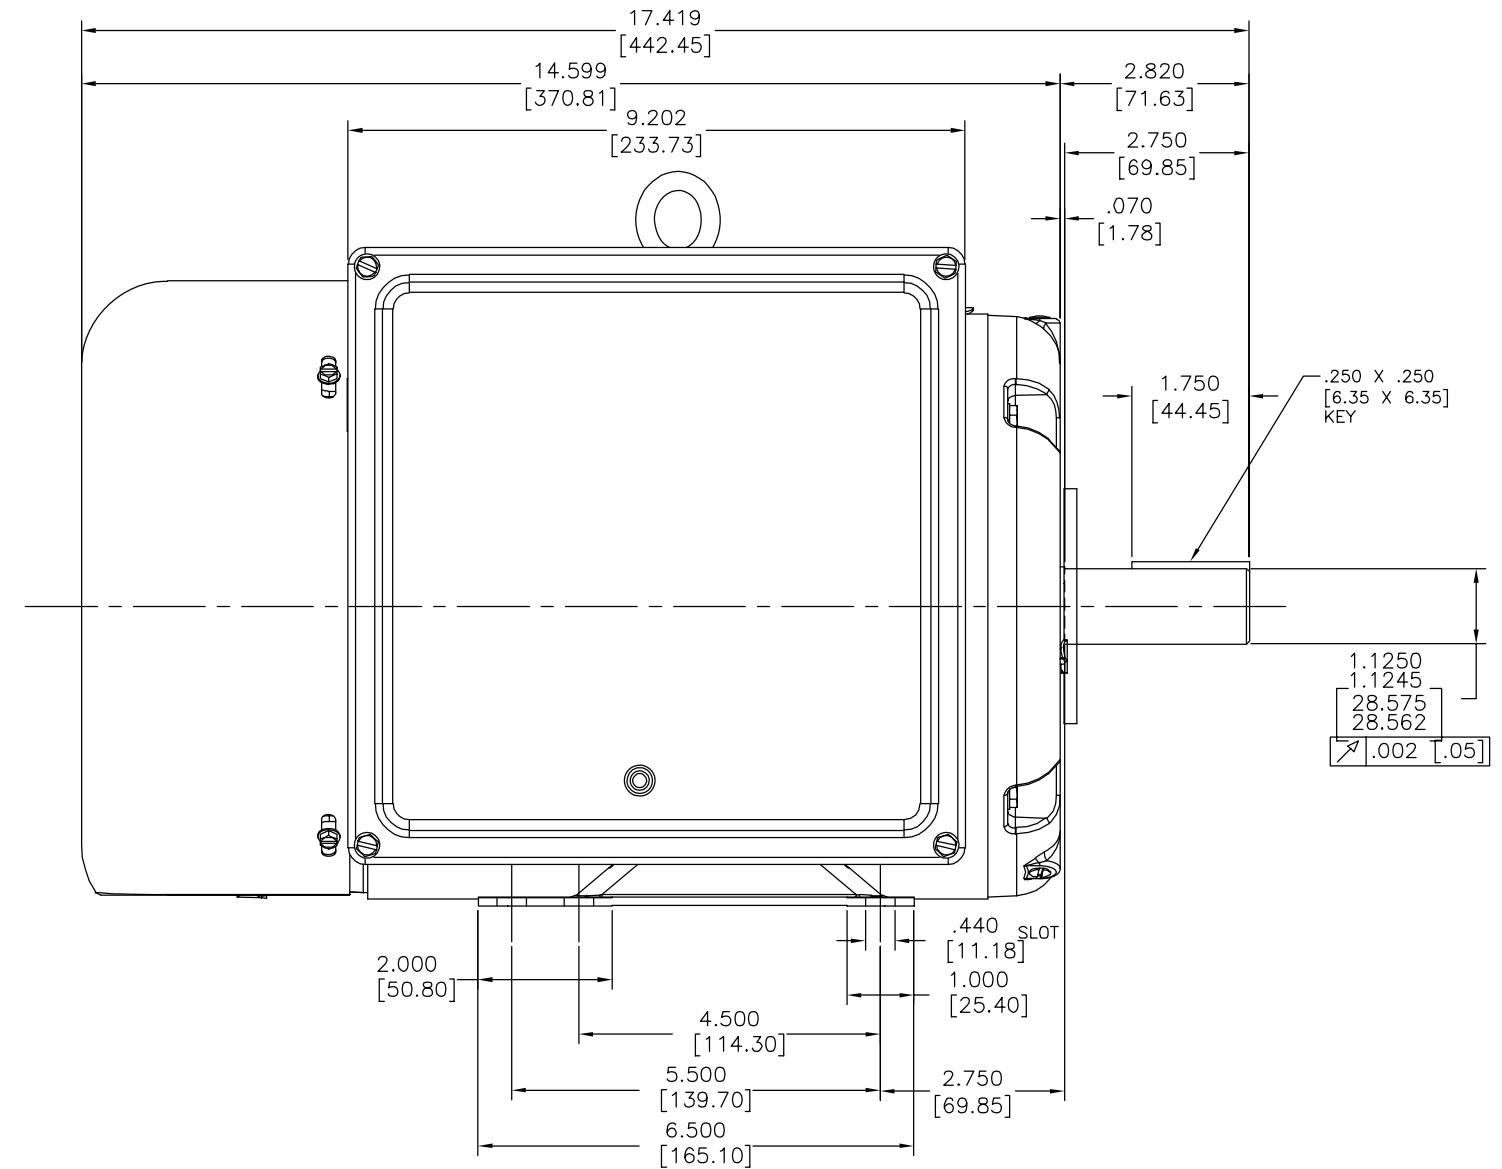
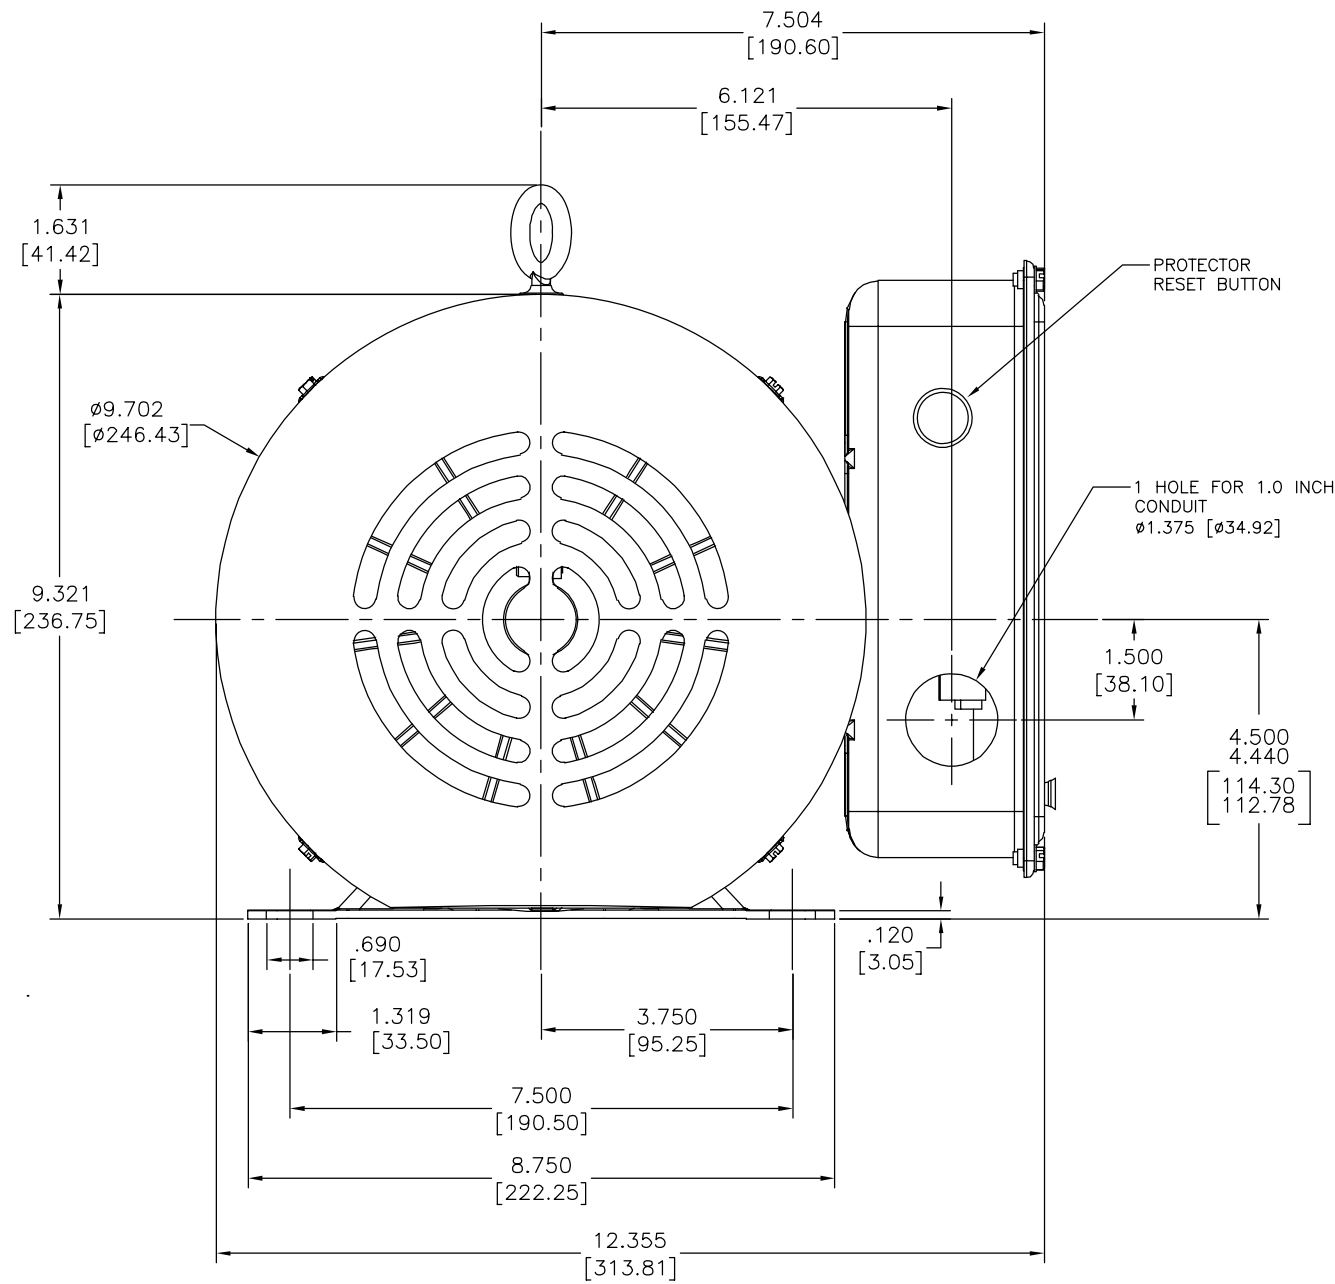



REV	ECO	REV BY	DATE	APPD	DATE
C	0025429	L. BERNAL	04-16-2012	D. BALDERRAMA	04-16-2012

- NOTES:
- 1- SINGLE PHASE TEFC RIGID BASE S182T OR S184T MOUNTING.
 - 2- MOTOR IS SUITABLE FOR ALL POSITION MOUNTING.
 - 3- MOTOR CANNOT BE FIELD CONVERTED FROM F1 TO F2 MOUNTING.







GEOMETRIC CHARACTERISTICS & SYMBOLS ▽ FLATNESS — STRAIGHTNESS ∟ ANGULARITY ⊥ PERPENDICULARITY (SQUARENESS) // PARALLELISM ○ ROUNDNESS (CIRCULARITY) ⌀ CYLINDRICITY ≡ PROFILE OF ANY SURFACE ⤴ PROFILE OF ANY LINE ⤵ RUNOUT ⊕ TRUE POSITION ⊙ CONCENTRICITY = SYMMETRY	UNLESS OTHERWISE SPECIFIED DIM. TOLERANCES ARE AS FOLLOWS: INCH $\pm .1$ $\pm .02$ $\pm .005$ $\pm .0005$ mm ± 0.5 ± 0.13 ± 0.013 ANG. $\pm .50$ DEG REMOVE BURRS & BREAK SHARP EDGES: INCH .003-.015 mm 0.1-0.4 CORNER FILLETS TO: INCH .020 mm 0.5 MACHINE SURFACES: INCH 125 mm 3.2 METRIC DIMS. SHOWN IN [BRACKETS]	DR BY: P.WILSON	07-11-2006	REGAL-BELOIT CORPORATION DESCRIPTION: OUTLINE SIZE: D DWG NO: 20087301-003 SCALE: NONE SHEET 1
		APPD: P.WILSON	06-07-2006	

CONFIDENTIAL: THIS DRAWING AND ITS INFORMATION ARE THE EXCLUSIVE AND CONFIDENTIAL PROPERTY OF REGAL-BELOIT CORPORATION AND ARE NOT TO BE DISCLOSED, DUPLICATED, DISTRIBUTED OR OTHERWISE USED WITHOUT THE WRITTEN CONSENT OF REGAL-BELOIT CORPORATION. -ALL RIGHTS RESERVED.

REVISION:	ECO	REVISADO POR:	L. BERNAL	FECHA:	04-16-2012	APROBADO POR:	D. BALDERRAMA	FECHA:	04-16-2012
C	0025429								





- NOTES:
- 1- SINGLE PHASE TEFC RIGID BASE S182T OR S184T MOUNTING.
 - 2- MOTOR IS SUITABLE FOR ALL POSITION MOUNTING.
 - 3- MOTOR CANNOT BE FIELD CONVERTED FROM F1 TO F2 MOUNTING.

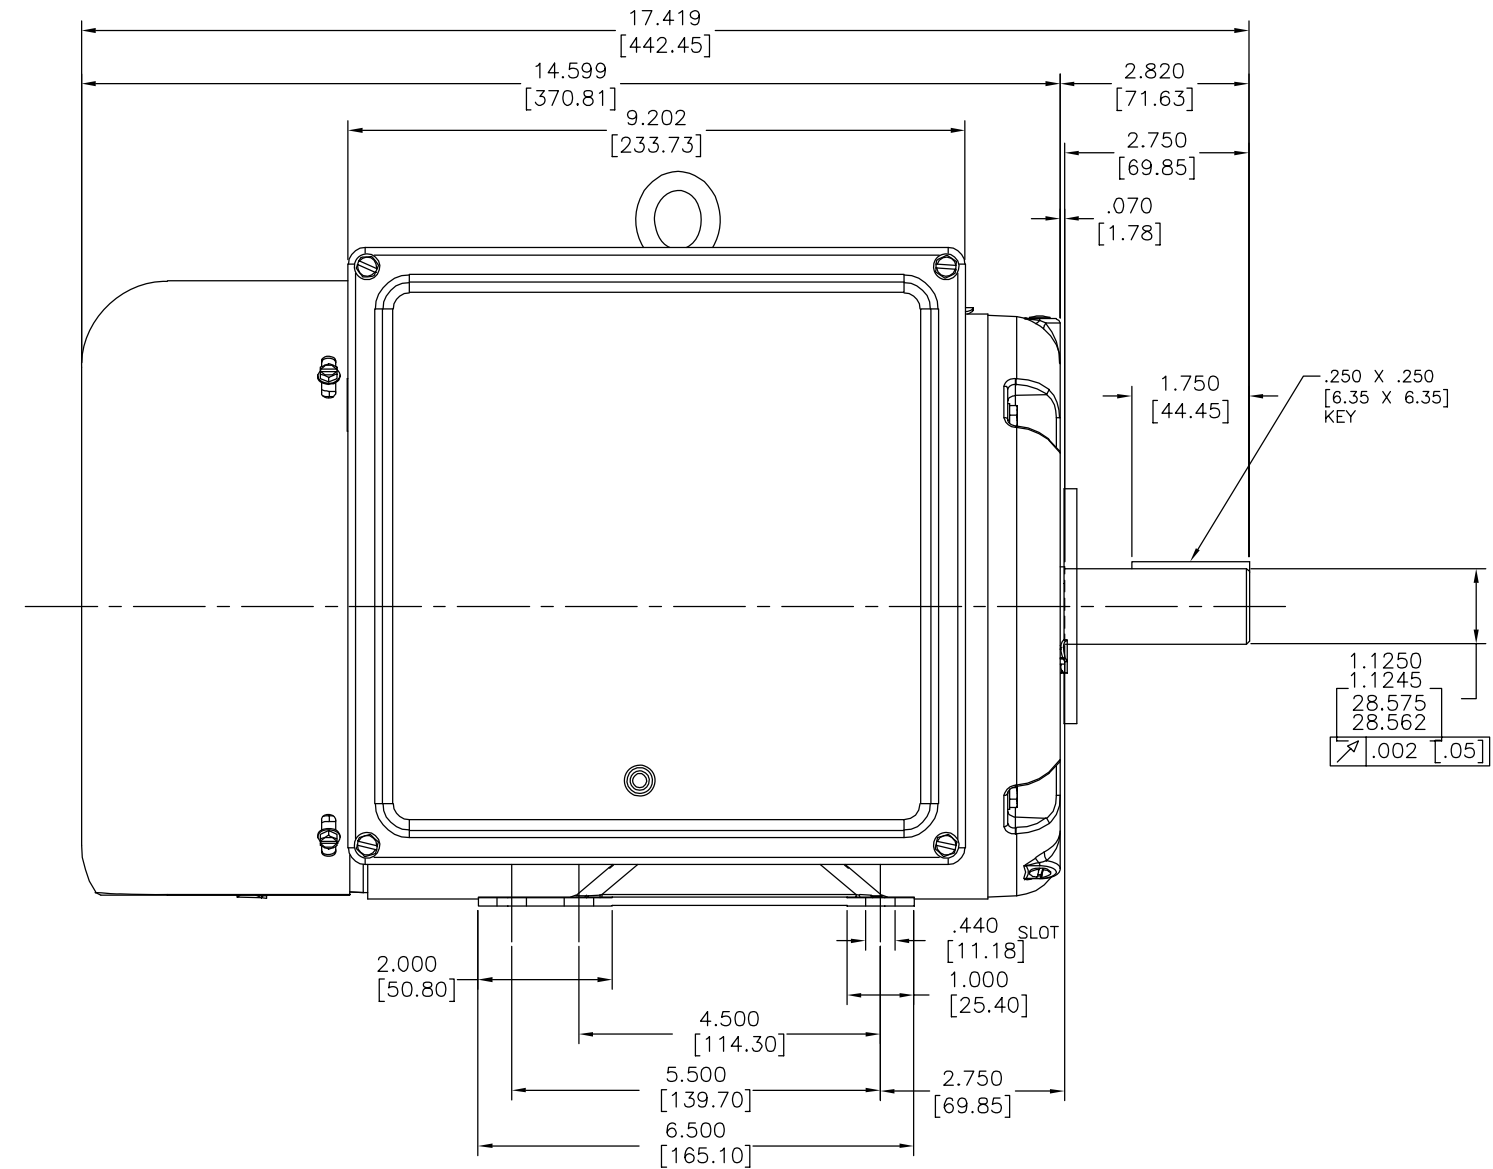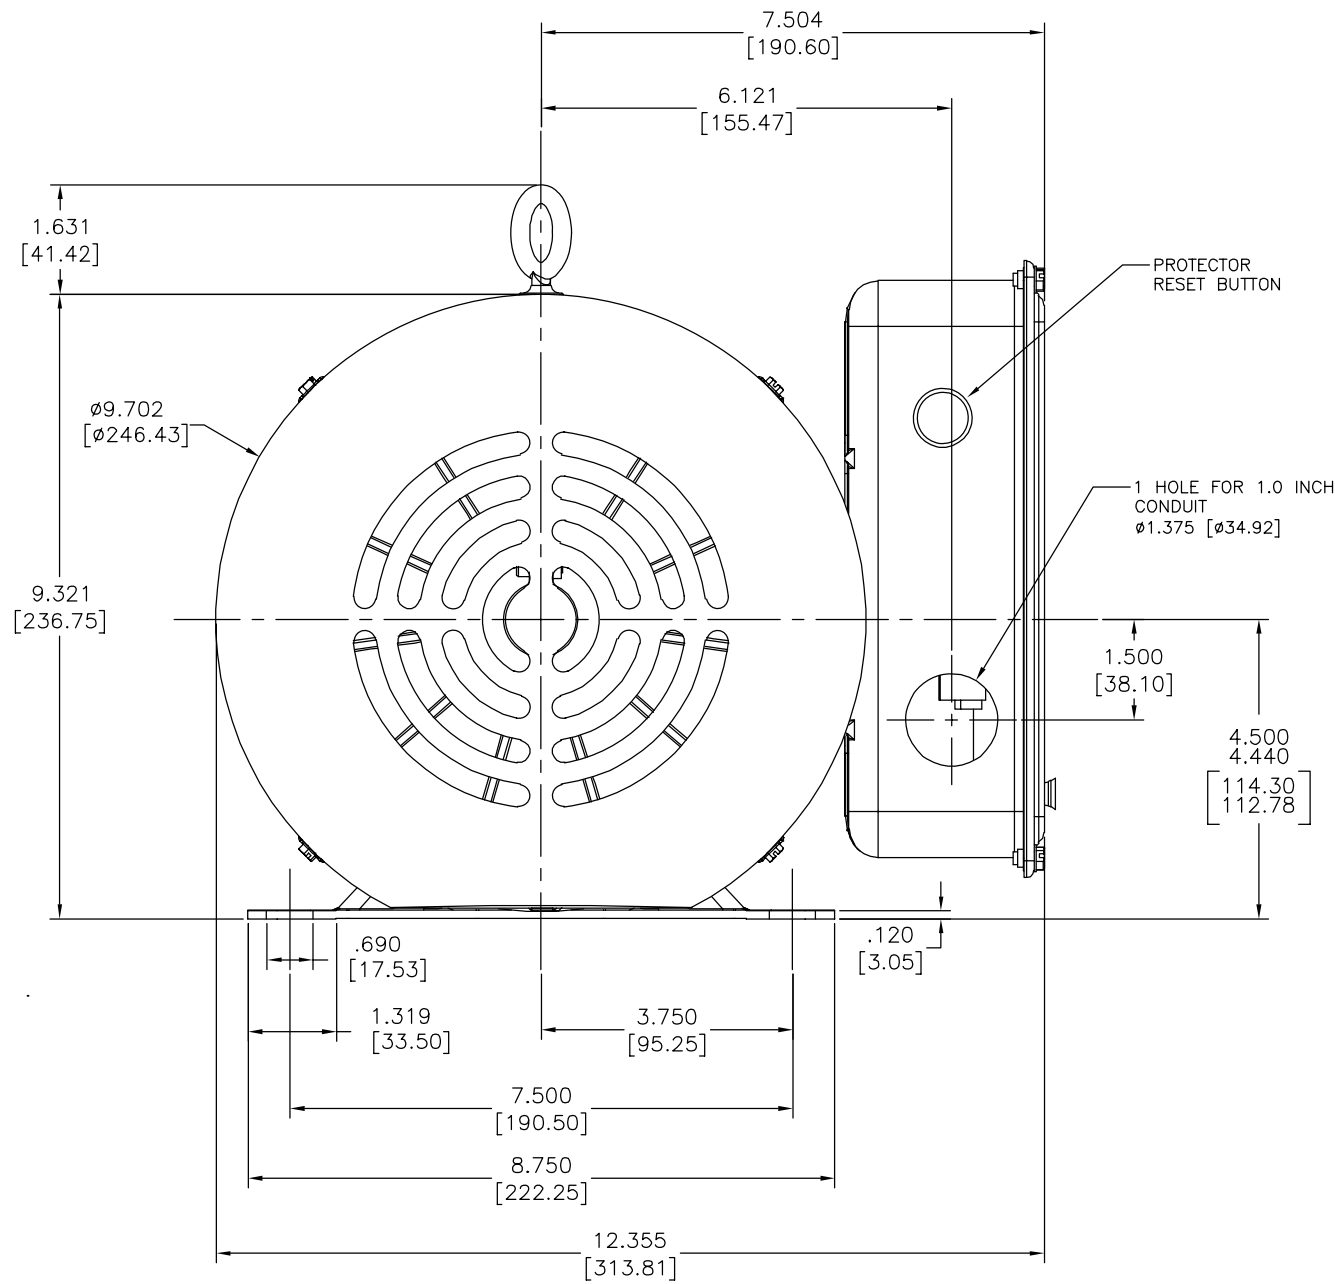

CARACTERISTICAS DE GEOMETRIA Y SIMBOLOS: □ PLANICIDAD — RECTITUD ∠ ANGULARIDAD ⊥ PERPENDICULARIDAD (A ESCUADRA) // PARALELISMO ○ REDONDEZ (CIRCULARIDAD) ∅ CILINDRICIDAD ∩ PERFIL DE CUALQUIER SUPERFICIE ∩ PERFIL DE CUALQUIER LINEA ∠ VARIACION ⊕ POSICION REAL ⊙ CONCENTRICIDAD = SIMETRIA	A MENOS QUE SE ESPECIFIQUE DE OTRA MANERA, LAS TOLERANCIAS DE LAS DIMS, SON LAS SIGUIENTES: PULG X XX XXX XXXX mm ±0.5 ±0.13 ±0.013 ANG ±50 GRADOS ELIMINAR REBABAS Y ORILLAS FILOSAS DEL BORDE. PULG .003-.015 mm 0.1-0.4 FILETEAR ESQUINA: PULG .020 mm 0.5 MAQUINAR SUPERFICIES PULG 125 mm 3.2 DIMS METRICAS MOSTRADAS [PARENTESIS]	DIBUJADO POR:	P.WILSON	07-11-2006	DESCRIPCION: OUTLINE
		APROBADO POR:	P.WILSON	06-07-2006	
CONFIDENCIAL: ESTE DIBUJO Y SU INFORMACION SON PROPIEDAD DE USO EXCLUSIVO Y CONFIDENCIAL DE REGAL-BELOIT CORPORATION, Y NO DEBERAN SER REVELADOS, DUPLICADOS, DISTRIBUIDOS O USARSE DE OTRA MANERA SIN EL CONSENTIMIENTO ESCRITO DE REGAL-BELOIT CORPORATION. -TODOS LOS DERECHOS RESERVADOS.		TAMANO:	D	NUMERO DE DIBUJO:	20087301-003
		ESCALA:	NONE	HOJA:	1

版本	ECO	编制	日期	批准	日期
C	0025429	L. BERNAL	04-16-2012	D. BALDERRAMA	04-16-2012

NOTES:
 1- SINGLE PHASE TEFC RIGID BASE S182T OR S184T MOUNTING.
 2- MOTOR IS SUITABLE FOR ALL POSITION MOUNTING.
 3- MOTOR CANNOT BE FIELD CONVERTED FROM F1 TO F2 MOUNTING.

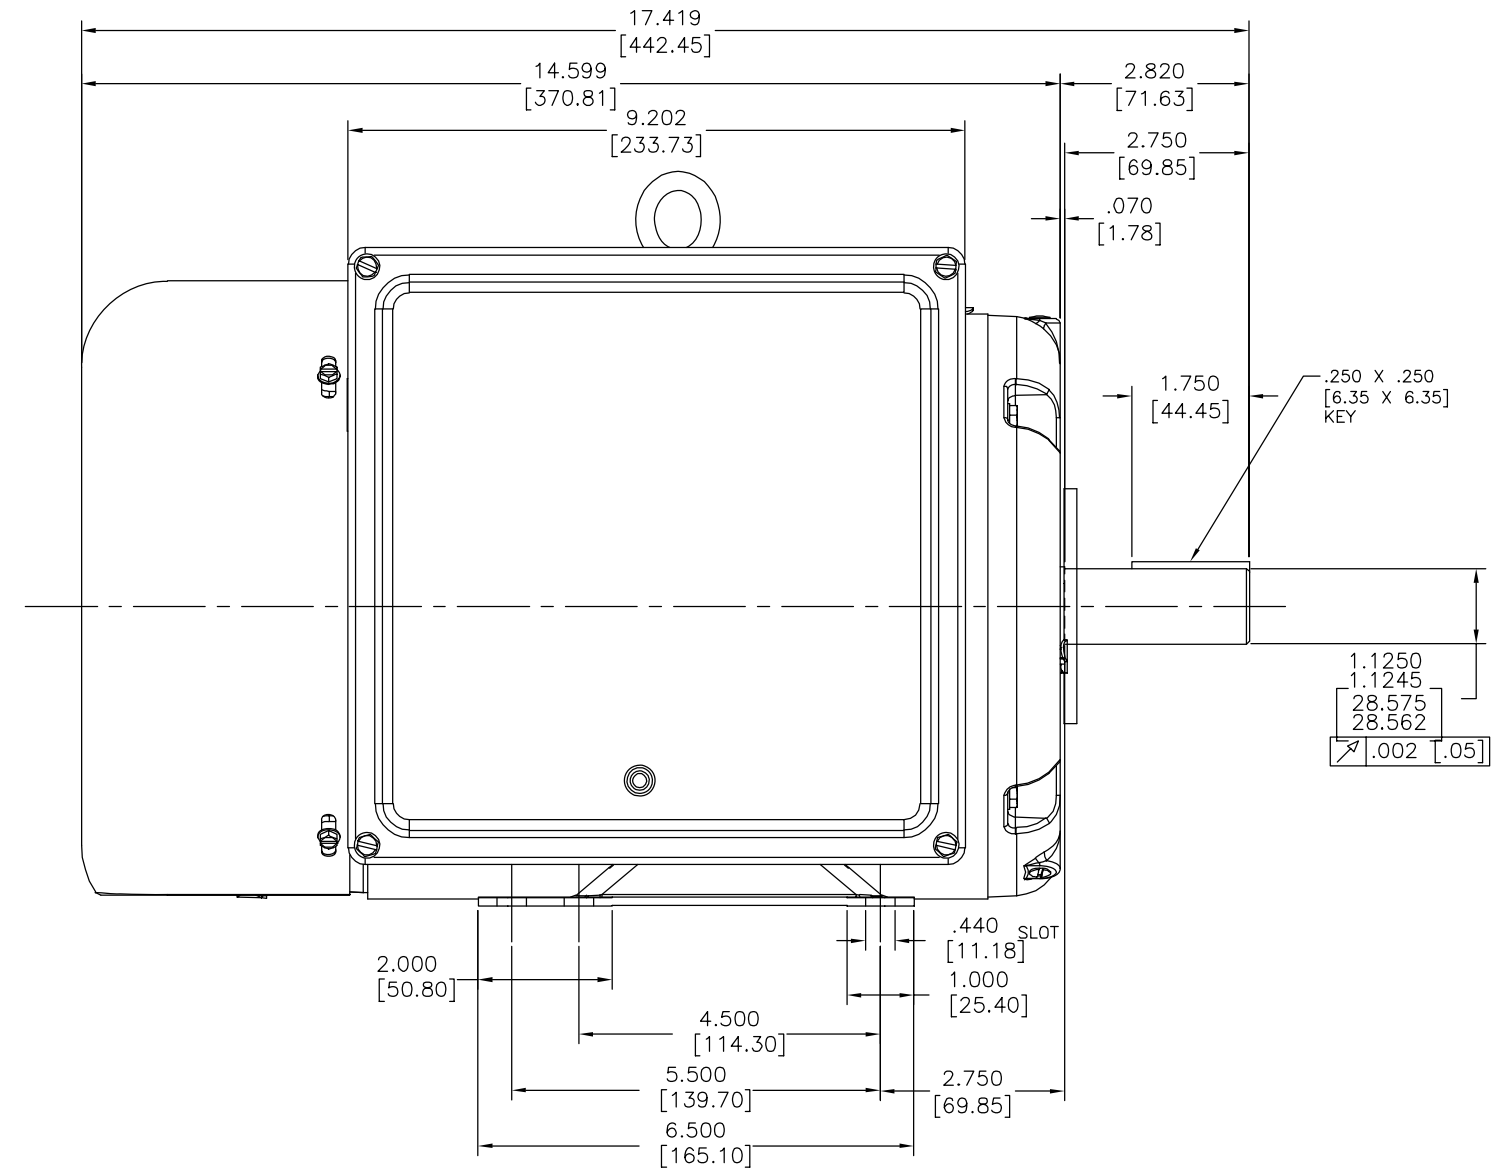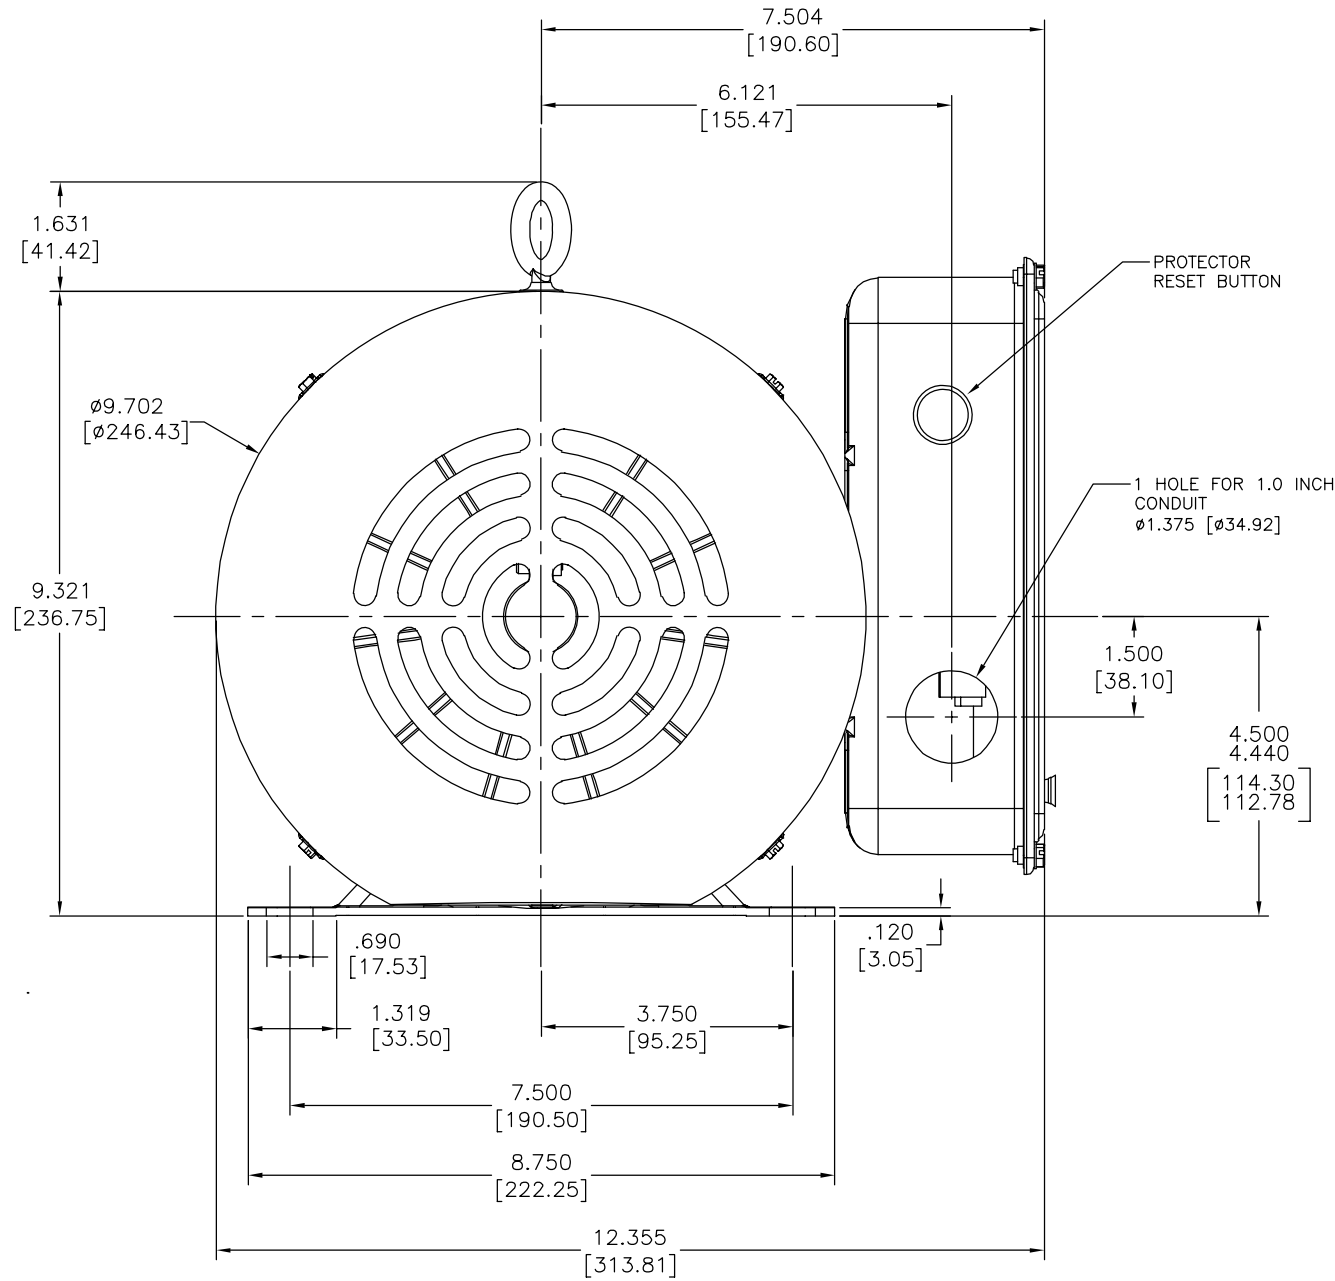

形位公差 平面度 直线度 倾斜度 垂直度 平行度 圆度 圆柱度 面轮廓度 线轮廓度 圆跳动 位置度 同轴度 对称度	除另有注明 尺寸公差如下: X XX XXX XXXX 英寸 $\pm .1 \pm .02 \pm .005 \pm .0005$ 毫米 $\pm 0.5 \pm 0.13 \pm 0.013$ 清理毛刺和尖棱 英寸 .003-.015 毫米 0.1-0.4 内圆角 英寸 .020 毫米 0.5 表面粗糙度 英制 125 米制 3.2 米制尺寸显示在 []	绘图: P.WILSON 07-11-2006	名称 OUTLINE
		批准: P.WILSON 06-07-2006	
第三角投影		图框格式版本 G	图号 20087301-003
机密: 本图纸及相关信息所有权归REGAL-BELOIT CORPORATION 未经REGAL-BELOIT CORPORATION书面授权, 不得泄露、 复制、传播或作其他用途。—版权所有			比例 NONE
ASME Y14.5M 1994		图号 20087301-003	页号 1