


Crossflow/Tangential Blower

Features: Motors are UL Listed and CSA Certified • Sleeve Bearing (Temperatures range from 40° to 400°F)
 • 16 Mounting slots allow for Top, Bottom, Front, and Back Mounting (slot size .218 x .562 long)
Applications: Refrigeration, Food Service, Wood Burning Stoves and Fireplaces



J504

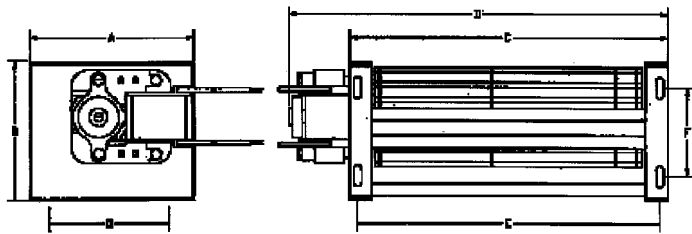

J507, J510, J513


Stock No.	Stack	Volts	Amps	RPM	Wheel Length	Dimensions				Mounting Slots		
						A	B	C	D	E	F	G
J504	7/8	115	0.5	2600	4.5"	4-1/4	3-1/2	6-1/8	7-9/16	5-3/4	2-1/4	3
J507	7/8	115	0.9	2600	7"	4-1/4	3-1/2	8-5/8	11	8-1/4	2-1/4	3
J510	1-1/8	115	1.15	2600	10"	4-1/4	3-1/2	11-5/8	13-15/16	11-1/4	2-1/4	3
J513	1-1/2	115	1.25	2600	13"	4-1/4	3-1/2	14-5/8	17-5/8	14-1/4	2-1/4	3

Crossflow Blower

Features: Motors are UL Listed and CSA Certified • Sleeve Bearing (Temperatures range from 40° to 400°F)
Applications: J571 and J572 are 180mm for Use in Electric Heat Applications
 J591 and J592 are 240mm for Use in Wood Stove Applications






J591, J592,
J571, J572

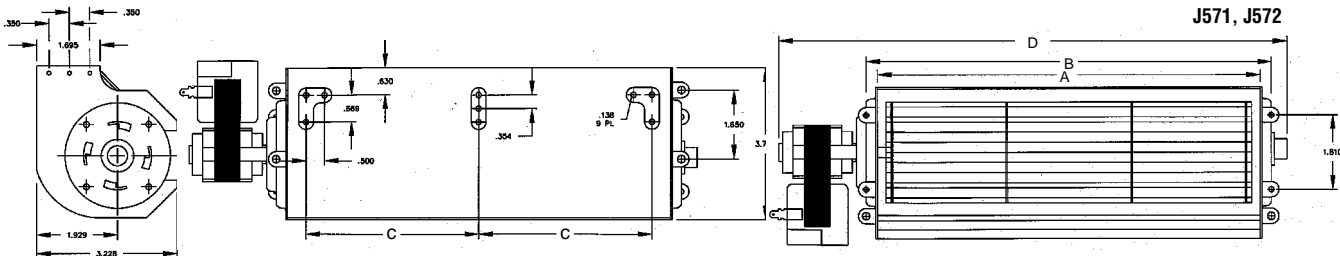

Stock No.	Stack	Volts	Amps	RPM	Wheel Length	A	B	C	D
J571	1/2	120	0.38	1800	7"	7-1/8	79/16	3	9-13/16
J572	1/2	208-240	0.16-0.2	1800	7"	7-1/8	79/16	3	9-13/16
J591	1-1/8	120	1.1	3100	9.4"	9-17/32	10	4-3/16	12-7/8
J592	1-1/8	240	0.64	3100	9.4"	9-17/32	10	4-3/16	12-7/8

Centrifugal Blower

Features: Motors are UL Listed and CSA Certified • Sleeve Bearing (Temperatures range from 40° to 400°F)
 • Mounting Accessories Packaged with Blower

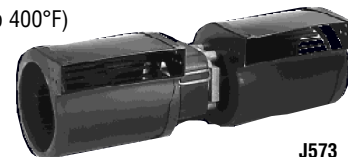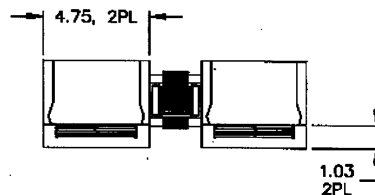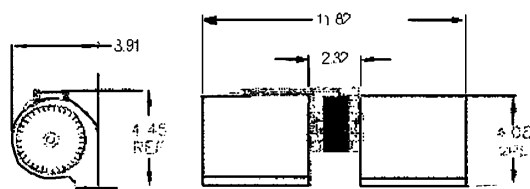

J573

Stock No.	Stack	Volts	Amps	RPM
J573	1-1/8	120	1.1	3000