
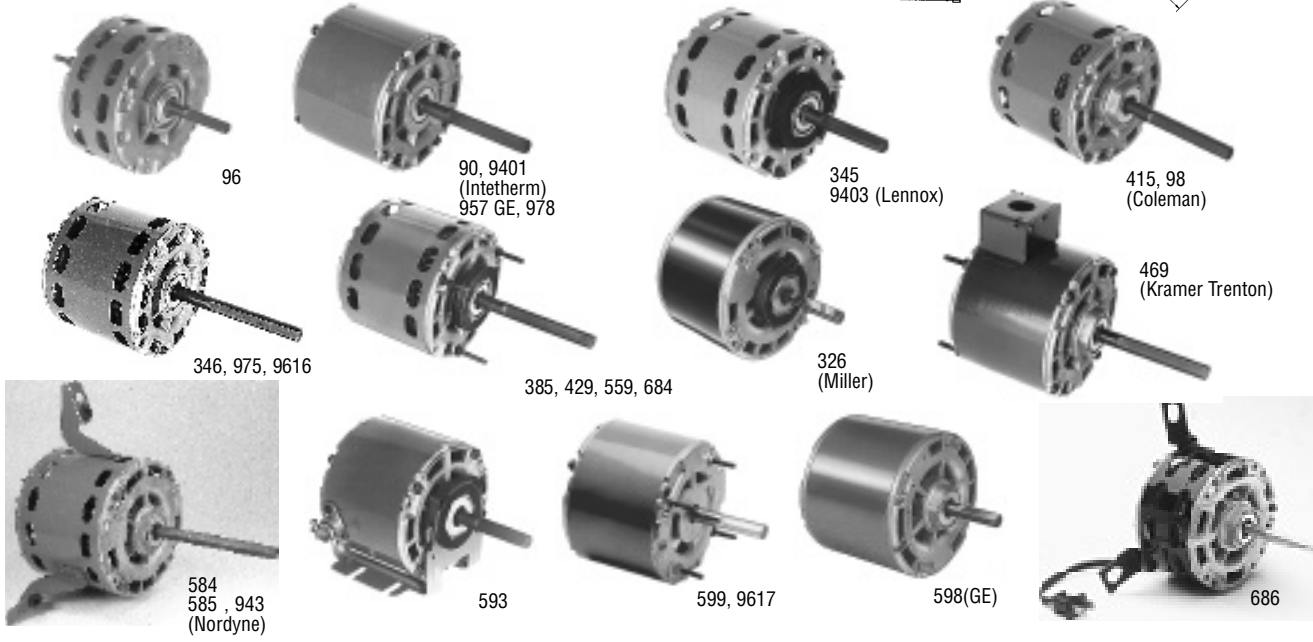


5" Diameter Stock Motors

Furnace Blowers & Attic Ventilators

Shaded Pole – 60 Hz – Continuous Duty, Air Over

OEM replacement for: Intetherm, Triangle Engineering, Butler Ventimatic, Tuttle & Bailey, Leigh Products, Nutone, Kool-O-Matic, Luxaire, Duotherm, Lennox, Coleman, Lear Siegler, Bryant, Janitrol, Westinghouse, American Standard, Miller, Johnson, Preway, etc.

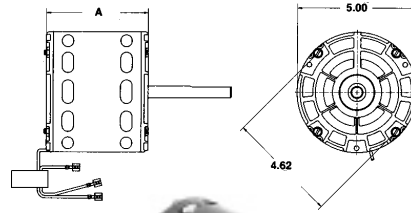

Stock No.	Rotation	Hp	Volts	RPM	Amps	Speeds	"A"	Shaft Diameter & Length	Iron Stack	Connection Diagram No.*	Notes
975	CWSE	1/20	115	1045	2.3	1	3	3/8 x 2-1/4	1/2		1,4
978	CWSE	1/20	115	1050	1.7	1	4-1/4	3/8 x 3	1-1/2		1
686	CWSE	1/15	115	1000	3.2	1	3	3/8 x 3-3/4	5/8		1
96	CWSE	1/15-1/30	115	1050	3.0-1.4	2	2-3/4	3/8 x 2-3/8	3/4	7u	
415	CWSE	1/12	115	1050	2.5	1	3-1/2	3/8 x 3-1/4	1-1/4		2
469	CWSE	1/12	115/230	1050	2.7/1.3	1	3-1/2	1/2 x 3-1/2	1-1/2	11u	1
9401	CWSE	1/10	115	1050	3.4	1	3-1/4	1/2 x 2-3/4	1		1
9617	CWSE	1/10	115	1050	4.3	1	3	1/2 x 4-1/2	1-3/4		
584	CWSE	1/8	115	1050	4.2	1	3-3/4	1/2 x 4	1-1/4		1
90	CWSE	1/8-1/10	115	1050	5.2-3.5	2	3-3/4	1/2 x 3-3/4	1-1/2	49u	1,4
346	CWSE	1/8-1/10	115	1050	4.8-3.3	2	4	1/2 x 4-1/2	1	49u	5
98	CWSE	1/8-1/10-1/12	115	1050	5.1-3.5-3.0	3	4-1/4	1/2 x 3-3/4	1-1/4	8u	1
326	CWSE	1/7	115	1050	5.2	1	3-1/2	1/2 x 3	1-1/4		1,4,5
345	CWSE	1/6	115	1050	7.0	1	4	1/2 x 3-3/4	1-3/4		5
585	CWSE	1/6	115	1050	7.9	1	4-1/4	1/2 x 4	1-3/4		1
943	CWSE	1/5	115	1050	6.7	1	4	1/2 x 3-3/4	1-3/4	Discontinued.use..OML6435	
684	CWSE	1/5-1/8	115	1050	6.8-4.2	2	3-3/4	1/2 x 3-3/8	2	7u	3,5
385	CWSE	1/5-1/6-1/8	115	1050	6.8-5.3-4.2	3	4	1/2 x 3-3/8	2	8u	5
559	CWSE	1/5-1/7-1/9-1/12	115	1050	7.9-5.8-4.3-3.5	4	4	1/2 x 4	1-3/4	9u	5
9403	CWSE	1/5-1/6-1/8	115	1075	4.8-3.7-2.9	3	4	1/2 x 3	1-3/4		1
429	CWSE	1/5-1/6-1/8	208-230	1050	3.4-2.7-2.2	3	4	1/2 x 3-3/8	2	8u	5
599	CCWSE	1/10-1/20-1/30	115	1550	3.0-1.7-1.0	3	3-3/4	1/2 x 2-5/8	1	8u	1,2
957	CWSE	1/8	230	1550	1.9	1	4-1/4	1/2 x 3	1-1/4		1
598	CWSE	1/8	230	1550	1.9	1	4-1/4	1/2 x 3	1-1/4		1
9616	CWSE	1/6	115	1550	6.0	1	4-1/4	1/2 x 2-1/4	1-3/4		
593	CCWSE	1/6	208-230	1550	3.2	1	4	1/2 x 3	1-1/2		

Notes:

1. Special OEM Replacement Motor (See Pages 97-122) will have an "A" dimension of 3-3/4")
2. Ball Bearings
3. Stock 684 "A" dimension was 4", motors built after 4/98
4. Supplied with Lead & Plug Assembly
5. Resilient Mounting Rings Included

*See Pages 160-163 for Diagram