

5-5/8" Diameter Fleximount Indoor Blower Motors

Furnaces - Air Handlers - Blowers

Features


- Auto Protector
- Continuous Air Over
- Energy Efficient S
- Fleximount
- Open Construction
- PSC
- Reversing Plug
- Sleeve Bearing
- 1/2" Dia. - Flatted Shaft
- 26" Leads Minimum
- 50° C Ambient
- 48 Frame (5-5/8" Dia.)
- 60 HZ



"FLEXIMOUNT" DESIGNED FOR 9" AND 10" SHAFT MOUNTED BLOWER WHEELS (CAPACITOR NOT INCLUDED)

HP	RPM/ Speeds	Volts	Rated	Amps Max.	Stock Number	Capac.	Dim. Ref.	Conn. Dia.	Notes
1/4	1075/3	115	3.5	3.6	FML1026	7.5/370V	1	10	S
1/4	1075/3	208-230	1.4	1.5	FM1026	5/370V	1	10	S
1/3	1075/3	115	6.0	7.6	FML1036	10/370V	2	10	S
1/3	1075/4	115	6.0		FML001	5/370	2	128	1 S
1/3	1075/3	208-230	2.7	3.7	FM1036	7.5/370V	2	10	S
1/2	1075/3	115	8.0	12.3	FML1056	10/370V	3	10	S
1/2	1075/3	208-230	3.4	4.9	FM1056	10/370V	3	10	S
1/2	1075/3	460	2.0	2.6	FMH1056	10/370V	5	133	S
3/4	1075/3	115	7.9	9.8	FML1076	15/370V	4	10	S
3/4	1075/3	208-230	4.9	5.9	FM1076	10/370V	4	10	S

Notes:
1. 40° C Ambient

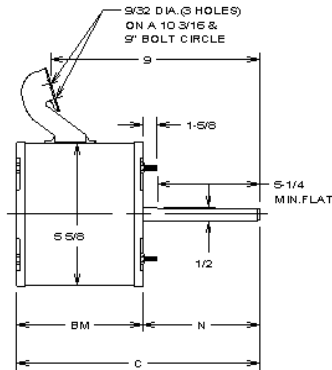

Approximate Dimensions

Ref.	BM	C	N
1	4.11	10.11	6
2	4.36	10.36	6
3	4.86	10.86	6
4	5.36	11.36	6
5	5.11	11.11	6