



NEW "MASTERFIT" MULTIPLE HORSEPOWER MOTORS
FOR THE REPLACEMENT MARKET

Catalog Model: FD6000
For use in different horsepower applications at
208-230 Volts, 60 Hz. Equivalent to 51-23022-41.

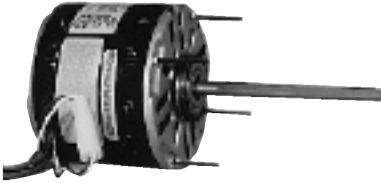

Rating Max	Motor Rating Possibilities:			Motor Specs:		Features:
	370V Capacitor	Speeds to Use	FLA	RPM:	1075	Sleeve Bearings
1/2 HP	10.0	All	3.9	Rot.:	Reversible	Reversing Plug
1/3 HP	5.0-or-7.5	All	3.6	Amb.:	40° C	Resilient Rings
1/4 HP	5.0-or-7.5	Med-Hi MedLo, Lo	2.5	Encl.:	Open	Extended Thru Bolts
1/5 HP	5.0-or-7.5	MedLo, Lo	1.8	Shaft:	1/2"x 4.5"	26" Leads
1/6 HP	5.0-or-7.5	Low	1.3		Flatted	Automatic Protector Conn. Dia. #130

Catalog Model: FDL6001
For use in different horsepower applications at
115 Volts, 60 Hz. Equivalent to 51-23012-41.

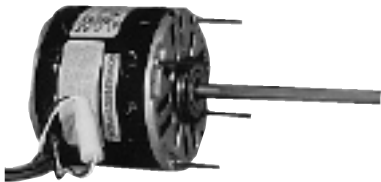

Rating Max	Motor Rating Possibilities:			Motor Specs:		Features:
	370V Capacitor	Speeds to Use	FLA	RPM:	1075	Sleeve Bearings
1/2 HP	10.0	All	7.0	Rot.:	Reversible	Reversing Plug
1/3 HP	5.0-or-7.5	All	6.7	Amb.:	40° C	Resilient Rings
1/4 HP	5.0-or-7.5	Med-Hi MedLo, Lo	4.4	Encl.:	Open	Extended Thru Bolts
1/5 HP	5.0-or-7.5	MedLo, Lo	3.2	Shaft:	1/2"x 4.5"	26" Leads
1/6 HP	5.0-or-7.5	Low	2.4		Flatted	Automatic Protector Conn. Dia. #130

Catalog Model: FSE6000
For use in different horsepower applications at
208-230 Volts, 60 Hz. Equivalent to 51-23052-21.



Rating Max	Motor Rating Possibilities:			Motor Specs:		Features:
	370V Capacitor	Speeds to Use	FLA	RPM:	1075	Sleeve Bearings
1/3 HP	7.5	Hi	2.8	Rot.:	Reversible	Reversing Plug
1/4 HP	7.5	Hi	2.0	Amb.:	60° C	Extended Thru Bolts
1/5 HP	7.5	Hi	1.7	Encl.:	Enclosed	27" Leads
1/6 HP	7.5	Low	1.5	Shaft:	1/2"x 6.0"	Automatic Protector
					Dbl Flat	Mounting Holes in Shell
						Conn. Dia. #16