


## PRESSURE RELIEF VALVES

Most Fuji Ring Compressors should not be operated in a “dead-head” condition. These relief valves are designed to protect the blowers from overheating when operating dead-headed. The valves are preset to provide the proper protection for the appropriate model, which is approximately 90% of the dead-head pressure level, and is adjustable to a lower setting.

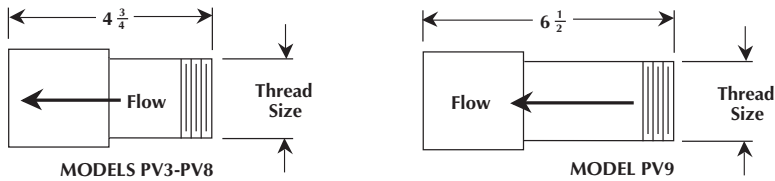

PRESSURE RELIEF VALVES			
Model No.	For Use With Blower Model	Factory Setting (“H <sub>2</sub> O”)	Thread Size
PV3	VFC30	42	1 1/2” MPT
PV4	VFC40	46	1 1/2” MPT
PV5	VFC50	68	1 1/2” MPT
PV6	VFC60	100	2” MPT
PV7	VFC70	98	2” MPT
PV8	VFC80	127	2” MPT
PV9	VFC90	127	2 1/2” MPT

Typical Pressure System

