

EMBRACE THE **MUD.** EMBRACE THE **DEBRIS.**

**SITE DRAINER™**  
**WON'T.**

PICTURED: SD 300

**MEET THE ONLY  
NON-CLOGGING ELECTRIC SUBMERSIBLE DEWATERING PUMP.**

**PATENTED TECHNOLOGY**

Site Drainer's™ patented "free flow design cylinder" technology<sup>1</sup> is unlike that of any other electric submersible dewatering pump on the market. Where other pumps will fail, Site Drainer™ allows the water to continue to flow freely even after a solid particle barrier is created.

**It simply will not clog.**

**LIMITLESS APPLICATIONS**

Mud, debris, gravel, sediment or sludge. You name it, Site Drainer™ can handle it. Site Drainer™ can work in virtually any environmental condition without contributing to erosion, which makes it environmentally sound. From flooded construction sites to flooded basements - **it works before, during and after the problem.**

**SUPERIOR PERFORMANCE**

Site Drainer™ is manufactured using corrosion resistant material and will not clog or run dry. It requires no assembly, tools and very little maintenance. With an automatic shut-off feature, it uses 90% less energy consumption than standard electric submersible dewatering pumps, which makes it an economical solution that is **built to last.**

DESIGNED &  
ASSEMBLED IN U.S.A.



NO TOOLS REQUIRED



NON-CLOGGING



**SITE DRAINER**  
THE NON-CLOGGING SOLUTION.

<sup>1</sup> U.S. patent no. 8,636,898. Other U.S. and foreign patents pending.



**SITE DRAINER**

THE NON-CLOGGING SOLUTION.

BE PREPARED FOR JUST ABOUT ANY RESIDENTIAL OR COMMERCIAL WATER REMOVAL NEED WITH WORRY-FREE PERFORMANCE.

SD300 Dimensions: 10.2"W X 15.1"H



DESIGNED & ASSEMBLED  
IN U.S.A.

**1/2 H.P.**



**115 Volts  
@ 60Hz**

**5.09 AMPS**

**Single phase**

**3/4" - 1 1/2"  
discharge**

**14.2 lbs.**

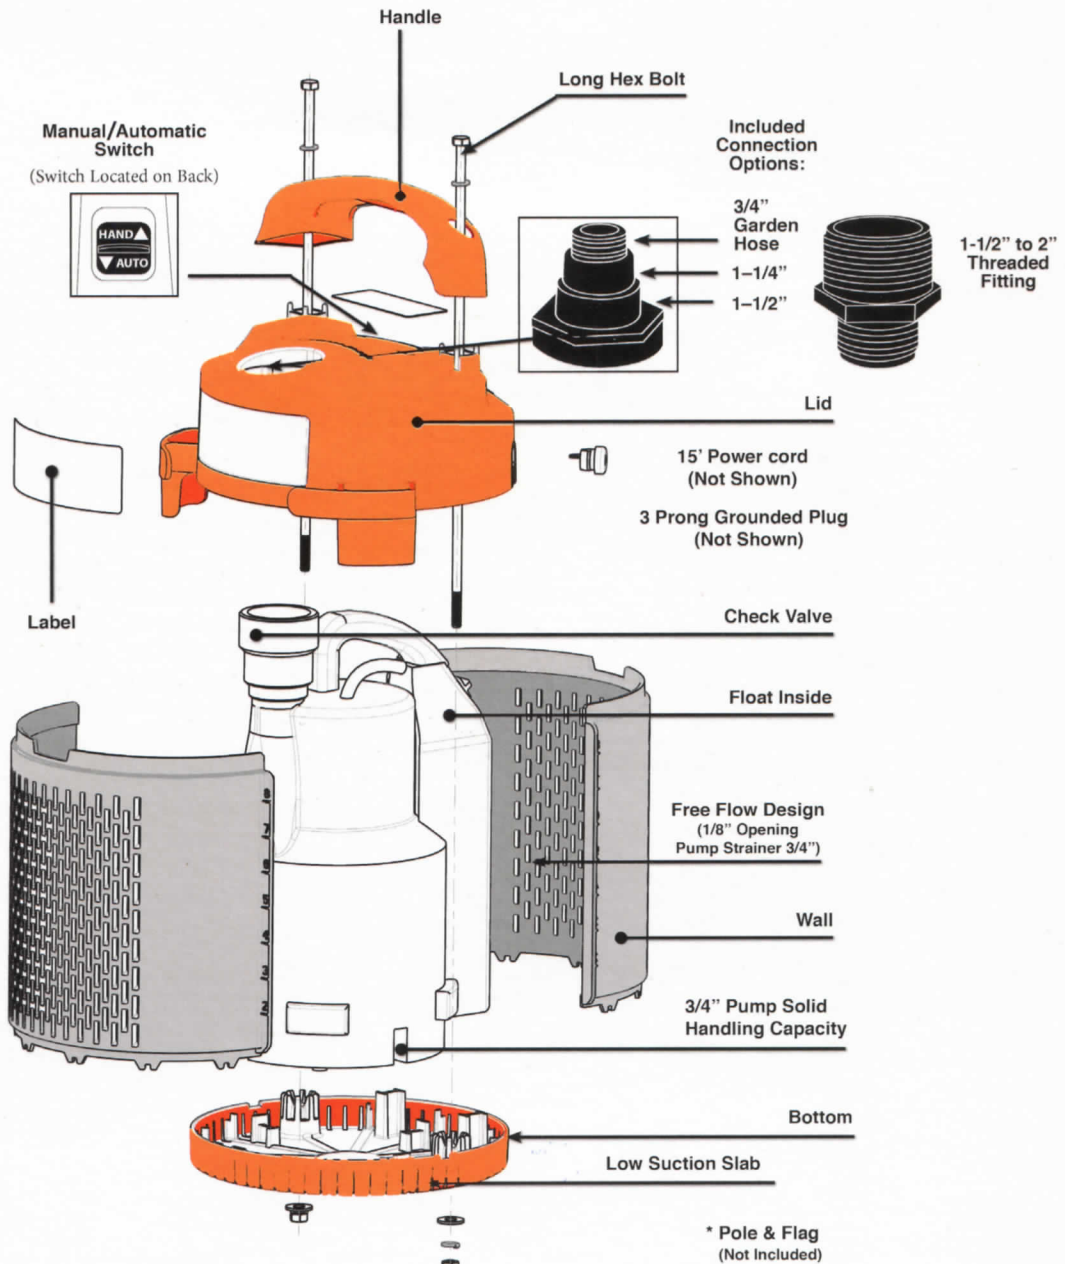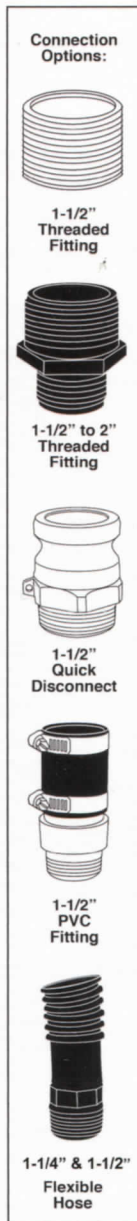

HEAD	32'	30'	25'	20'	15'	10'	5'
GPM	---	5	20	35	47	57	65
GPH	---	300	1,200	2,100	2,820	3,420	3,900

1-800-726-2080  
www.SiteDrainer.com

Visit your nearest  
Site Drainer™ dealer: