

A/B-C-D • CAST IRON SHEAVES



LEESON offers a comprehensive line of A/B-C-D pulleys for "Quick Detachable" (QD) taper bushings.


Also referred to as classical V-Belt sheaves each item is made under ISO quality assurance systems.

Features:


GG25 high performance cast iron

Precision CNC machining


Precision balancing to 06.3

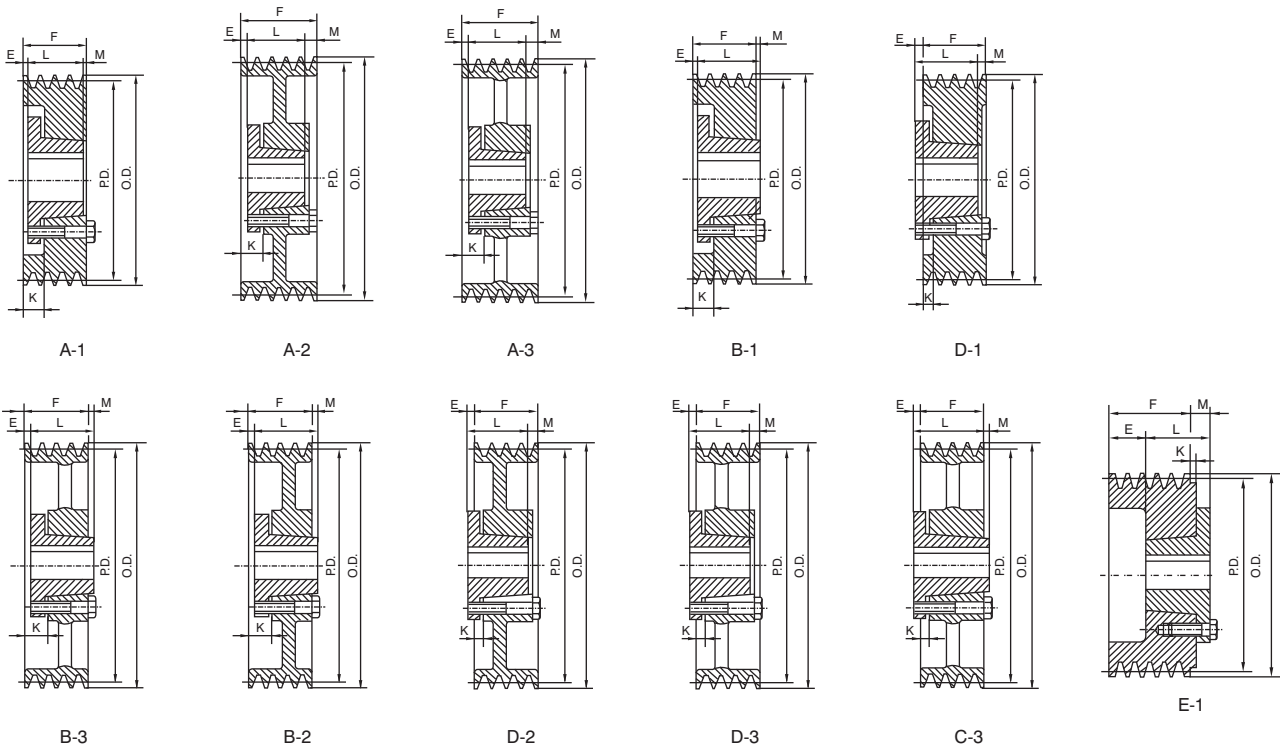

NOMENCLATURE FOR TAPER-LOCK SHEAVES FOR STANDARD NARROW V BELT

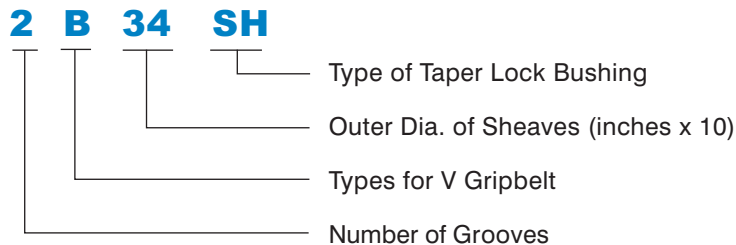

A/B-C-D

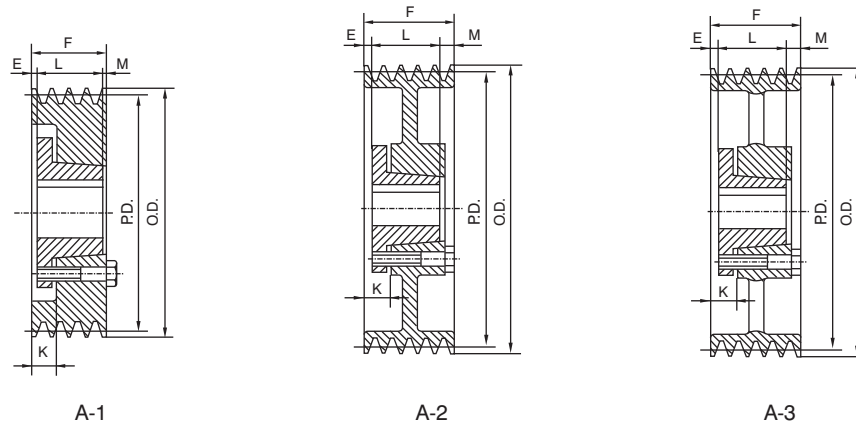

D-5

F = 7 1/2" (190.50mm)

Part No.	O.D.	PD.	Bush Max Bore	Bush	Type	Db	E	K	L	M	Wgt. Less Bush
5 D 120 F	12.60	12.00	3/15/16	F	A2	7	21/16	31/16	35/8	113/16	87
5 D 130 F	13.60	13.00	3/15/16	F	A2	7	21/16	31/16	35/8	113/16	88
5 D 135 F	14.10	13.50	3/15/16	F	A2	7	21/16	31/16	35/8	113/16	92
5 D 140 F	14.60	14.00	3/15/16	F	A2	7	21/16	31/16	35/8	113/16	96
5 D 145 F	15.10	14.50	3/15/16	F	A2	7	21/16	31/16	35/8	113/16	111
5 D 150 F	15.60	15.00	3/15/16	F	A2	7	21/16	31/16	35/8	113/16	115
5 D 155 F	16.10	15.50	3/15/16	F	A2	7	21/16	31/16	35/8	113/16	121
5 D 160 F	16.60	16.00	3/15/16	F	A2	7	21/16	31/16	35/8	113/16	128
5 D 170 J	17.60	17.00	4/1/2	J	A2	7 3/4	3/8	19/16	4 1/2	25/8	135
5 D 180 J	18.60	18.00	4/1/2	J	A3	7 3/4	3/8	19/16	4 1/2	25/8	148
5 D 200 J	20.60	20.00	4/1/2	J	A3	7 3/4	3/8	19/16	4 1/2	25/8	184
5 D 220 J	22.60	22.00	4/1/2	J	A3	7 3/4	3/8	19/16	4 1/2	25/8	202
5 D 270 M	27.60	27.00	5/1/2	M	A3	9 1/2	1/2	115/16	63/4	1/4	250
5 D 330 M	33.60	33.00	5/1/2	M	A3	9 1/2	1/2	115/16	63/4	1/4	280
5 D 400 M	40.60	40.00	5/1/2	M	A3	9 1/2	1/2	115/16	63/4	1/4	380

D-6

F = 8 15/16" (227.01mm)

Part No.	O.D.	PD.	Bush Max Bore	Bush	Type	Db	E	K	L	M	Wgt. Less Bush
6 D 120 J	12.60	12.00	4/1/2	J	A1	—	2 1/8	35/16	4 1/2	25/16	104
6 D 130 J	13.60	13.00	4/1/2	J	A1	—	2 1/8	35/16	4 1/2	25/16	122
6 D 135 J	14.10	13.50	4/1/2	J	A1	—	2 1/8	35/16	4 1/2	25/16	125
6 D 140 J	14.60	14.00	4/1/2	J	A1	—	2 1/8	35/16	4 1/2	25/16	128
6 D 145 J	15.10	14.50	4/1/2	J	A1	—	2 1/8	35/16	4 1/2	25/16	130
6 D 150 J	15.60	15.00	4/1/2	J	A2	7 3/4	2 1/8	35/16	4 1/2	25/16	136
6 D 155 J	16.10	15.50	4/1/2	J	A2	7 3/4	2 1/8	35/16	4 1/2	25/16	139
6 D 160 J	16.60	16.00	4/1/2	J	A2	7 3/4	2 1/8	35/16	4 1/2	25/16	141
6 D 170 J	17.60	17.00	4/1/2	J	A2	7 3/4	2 1/8	35/16	4 1/2	25/16	154
6 D 180 J	18.60	18.00	4/1/2	J	A2	7 3/4	2 1/8	35/16	4 1/2	25/16	172
6 D 200 J	20.60	20.00	4/1/2	J	A2	7 3/4	2 1/8	35/16	4 1/2	25/16	183
6 D 220 M	22.60	22.00	5/1/2	M	A2	7 3/4	1/2	115/16	63/4	111/16	272
6 D 270 M	27.60	27.00	5/1/2	M	A3	9 1/2	1/2	115/16	63/4	111/16	280
6 D 330 M	33.60	33.00	5/1/2	M	A3	9 1/2	1/2	115/16	63/4	111/16	356
6 D 400 M	40.60	40.00	5/1/2	M	A3	9 1/2	1/2	115/16	63/4	111/16	415
6 D 440 M	44.60	44.00	5/1/2	M	A3	9 1/2	1/2	115/16	63/4	111/16	536
6 D 480 M	48.60	48.00	5/1/2	M	A3	9 1/2	1/2	115/16	63/4	111/16	572
6 D 580 N	58.60	58.00	6	N	A3	10 1/2	1/2	2 1/4	8 1/8	5/16	1006

FOR QTL TAPER BUSHING - SEE PAGE 10

A/B-C-D