

A/B-C-D • CAST IRON SHEAVES



LEESON offers a comprehensive line of A/B-C-D pulleys for "Quick Detachable" (QD) taper bushings.


Also referred to as classical V-Belt sheaves each item is made under ISO quality assurance systems.

Features:


GG25 high performance cast iron

Precision CNC machining


Precision balancing to 06.3

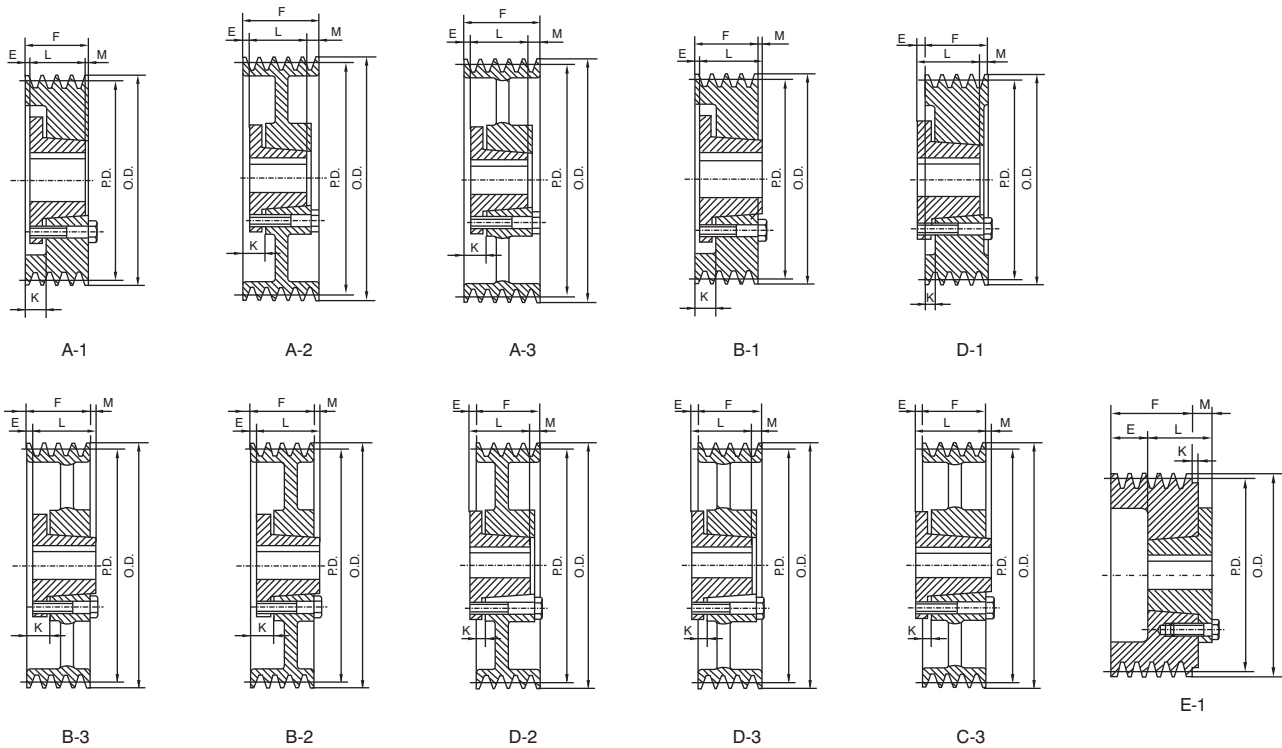

NOMENCLATURE FOR TAPER-LOCK SHEAVES FOR STANDARD NARROW V BELT

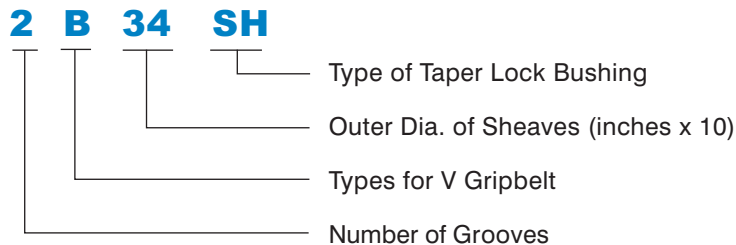

A/B-C-D

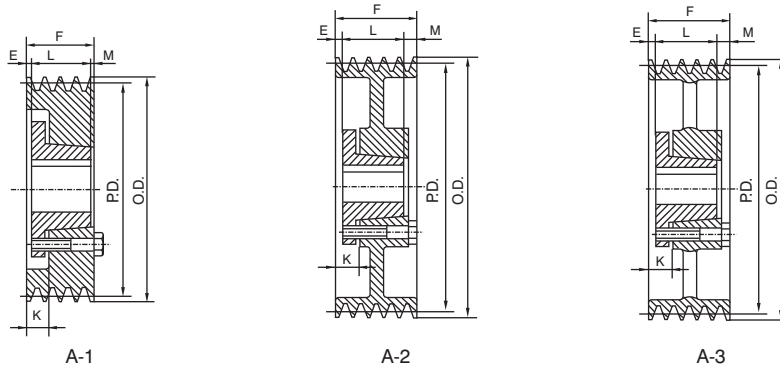

D-8

F = 11 13/16" (300.04mm)

Part No.	O.D.	P.D.	Bush Max Bore	Bush	Type	Db	E	K	L	M	Wgt. Less Bush
8 D 120 J	12.60	12.00	4 1/2	J	A 1	—	23/8	39/16	4 1/2	4 15/16	126
8 D 130 J	13.60	13.00	4 1/2	J	A 1	—	23/8	39/16	4 1/2	4 15/16	147
8 D 135 J	14.10	13.50	4 1/2	J	A 1	—	23/8	39/16	4 1/2	4 15/16	150
8 D 140 J	14.60	14.00	4 1/2	J	A 1	—	23/8	39/16	4 1/2	4 15/16	155
8 D 145 J	15.10	14.50	4 1/2	J	A 1	—	23/8	39/16	4 1/2	4 15/16	160
8 D 150 J	15.60	15.00	4 1/2	J	A 2	7 3/4	23/8	39/16	4 1/2	4 15/16	176
8 D 155 J	16.10	15.50	4 1/2	J	A 2	7 3/4	23/8	39/16	4 1/2	4 15/16	180
8 D 160 J	16.60	16.00	4 1/2	J	A 2	7 3/4	23/8	39/16	4 1/2	4 15/16	200
8 D 170 M	17.60	17.00	5 1/2	M	A 1	—	2 1/2	3 15/16	6 3/4	29/16	225
8 D 180 M	18.60	18.00	5 1/2	M	A 2	9 1/2	2 1/2	3 15/16	6 3/4	29/16	250
8 D 200 M	20.60	20.00	5 1/2	M	A 2	9 1/2	2 1/2	3 15/16	6 3/4	29/16	270
8 D 220 M	22.60	22.00	5 1/2	M	A 2	9 1/2	1/2	1 15/16	6 3/4	49/16	316
8 D 270 M	27.60	27.00	5 1/2	M	A 3	9 1/2	1/2	1 15/16	6 3/4	49/16	440
8 D 330 M	33.60	33.00	5 1/2	M	A 3	9 1/2	1/2	1 15/16	6 3/4	49/16	458
8 D 400 N	40.60	40.00	6	N	A 3	10 1/2	1/2	2 1/4	8 1/8	39/16	638
8 D 440 N	44.60	44.00	6	N	A 3	10 1/2	1/2	2 1/4	8 1/8	39/16	616
8 D 480 N	48.60	48.00	6	N	A 3	10 1/2	1/2	2 1/4	8 1/8	39/16	755
8 D 580 N	58.60	58.00	6	N	A 3	10 1/2	1/2	2 1/4	8 1/8	39/16	1112

D-10

F = 14 11/16" (373.06mm)

Part No.	O.D.	P.D.	Bush Max Bore	Bush	Type	Db	E	K	L	M	Wgt. Less Bush
10 D 120 M	12.60	12.00	5 1/2	M	A 1	—	2 1/2	3 15/16	6 3/4	5 7/16	158
10 D 130 M	13.60	13.00	5 1/2	M	A 1	—	2 1/2	3 15/16	6 3/4	5 7/16	178
10 D 135 M	14.10	13.50	5 1/2	M	A 1	—	2 1/2	3 15/16	6 3/4	5 7/16	196
10 D 140 M	14.60	14.00	5 1/2	M	A 1	—	2 1/2	3 15/16	6 3/4	5 7/16	207
10 D 145 M	15.10	14.50	5 1/2	M	A 1	—	2 1/2	3 15/16	6 3/4	5 7/16	225
10 D 150 M	15.60	15.00	5 1/2	M	A 1	—	2 1/2	3 15/16	6 3/4	5 7/16	238
10 D 155 M	16.10	15.50	5 1/2	M	A 1	—	2 1/2	3 15/16	6 3/4	5 7/16	260
10 D 160 M	16.60	16.00	5 1/2	M	A 1	—	2 1/2	3 15/16	6 3/4	5 7/16	279
10 D 170 M	17.60	17.00	5 1/2	M	A 1	—	2 1/2	3 15/16	6 3/4	5 7/16	292
10 D 180 M	18.60	18.00	5 1/2	M	A 1	—	2 1/2	3 15/16	6 3/4	5 7/16	330
10 D 200 M	20.60	20.00	5 1/2	M	A 2	9 1/2	2 1/2	3 15/16	6 3/4	5 7/16	340
10 D 220 M	22.60	22.00	5 1/2	M	A 3	9 1/2	1 1/2	2 15/16	6 3/4	6 7/16	355
10 D 270 M	27.60	27.00	5 1/2	M	A 3	9 1/2	1 1/2	2 15/16	6 3/4	6 7/16	398
10 D 330 N	33.60	33.00	6	N	A 3	10 1/2	1 1/2	3 1/4	8 1/8	5 1/16	434
10 D 400 N	40.60	40.00	6	N	A 3	10 1/2	1 1/2	3 1/4	8 1/8	5 1/16	502
10 D 440 N	44.60	44.00	6	N	A 3	10 1/2	1 1/2	3 1/4	8 1/8	5 1/16	727
10 D 480 P	48.60	48.00	6 3/4	P	A 3	13	5/8	2 5/8	9 3/8	4 11/16	755
10 D 580 P	58.60	58.00	6 3/4	P	A 3	13	5/8	2 5/8	9 3/8	4 11/16	1286