

A/B-C-D • CAST IRON SHEAVES



LEESON offers a comprehensive line of A/B-C-D pulleys for "Quick Detachable" (QD) taper bushings.


Also referred to as classical V-Belt sheaves each item is made under ISO quality assurance systems.

Features:


GG25 high performance cast iron

Precision CNC machining


Precision balancing to 06.3

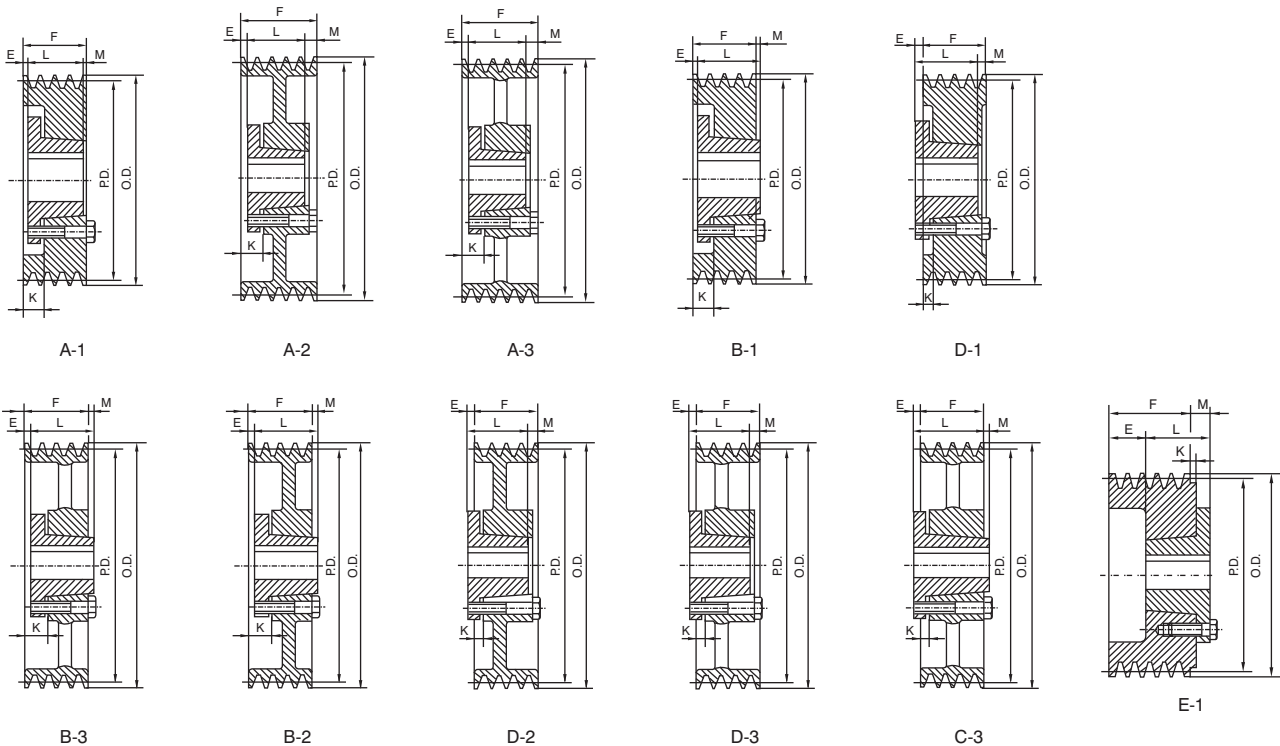

NOMENCLATURE FOR TAPER-LOCK SHEAVES FOR STANDARD NARROW V BELT

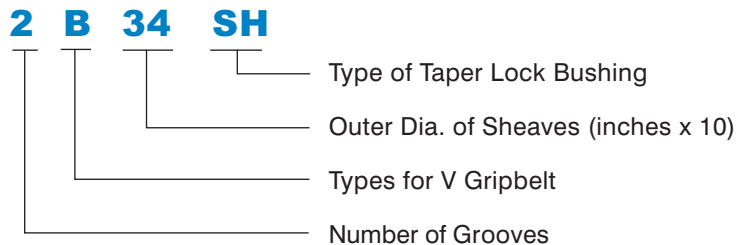

A/B-C-D

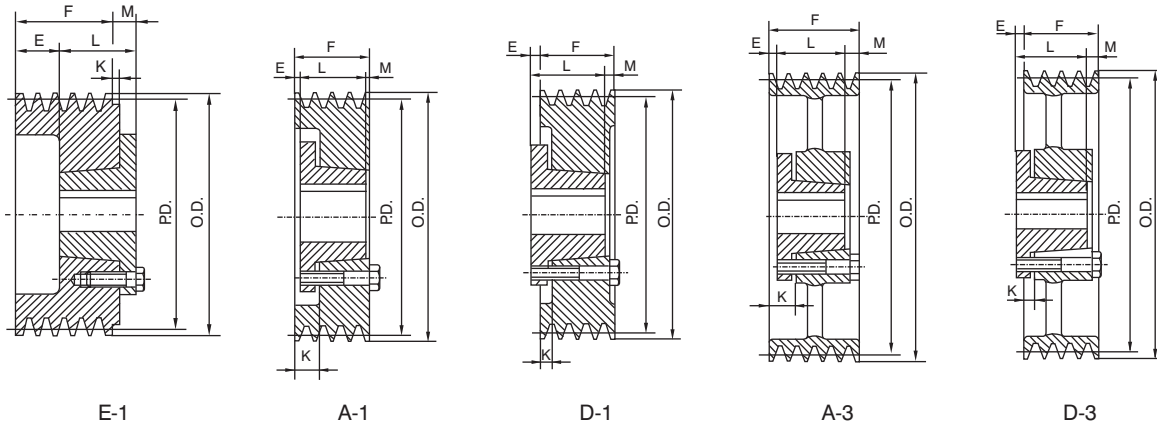

A/B-3

F=2 1/2" (63.50mm)

Part No.	P.D.		O.D.	Bush	Type	Bush Max. Bore	E	K	L	M	Wgt. Less Bush
	A Belt	B Belt									
3 B 34 SH	3.00	3.40	3.75	SH	E1	1 11/16	13/4	—	15/16	9/16	3.4
3 B 36 SH	3.20	3.60	3.95	SH	D1	1 11/16	3/8	3/16	15/16	19/16	3.8
3 B 38 SH	3.40	3.80	4.15	SH	D1	1 11/16	3/8	3/16	15/16	19/16	4.0
3 B 40 SH	3.60	4.00	4.35	SH	A1	1 11/16	1/2	1 1/16	15/16	11/16	4.5
3 B 42 SH	3.80	4.20	4.55	SH	A1	1 11/16	1/2	1 1/16	15/16	11/16	5.0
3 B 44 SH	4.00	4.40	4.75	SH	A1	1 11/16	1/2	1 1/16	15/16	11/16	5.5
3 B 46 SD	4.20	4.60	4.95	SD	A1	2	7/16	1 1/16	1 13/16	1/4	6.0
3 B 48 SD	4.40	4.80	5.15	SD	A1	2	7/16	1 1/16	1 13/16	1/4	6.5
3 B 50 SD	4.60	5.00	5.35	SD	A1	2	7/16	1 1/16	1 13/16	1/4	7.0
3 B 52 SD	4.80	5.20	5.55	SD	A1	2	7/16	1 1/16	1 13/16	1/4	8.0
3 B 54 SD	5.00	5.40	5.75	SD	A1	2	7/16	1 1/16	1 13/16	1/4	8.5
3 B 56 SD	5.20	5.60	5.95	SD	A1	2	7/16	1 1/16	1 13/16	1/4	9.0
3 B 58 SD	5.40	5.80	6.15	SD	A1	2	7/16	1 1/16	1 13/16	1/4	10.0
3 B 60 SD	5.60	6.00	6.35	SD	A1	2	7/16	1 1/16	1 13/16	1/4	11.0
3 B 62 SD	5.80	6.20	6.55	SD	A1	2	7/16	1 1/16	1 13/16	1/4	12.0
3 B 64 SD	6.00	6.40	6.75	SD	A1	2	7/16	1 1/16	1 13/16	1/4	12.36
3 B 66 SD	6.20	6.60	6.95	SD	A1	2	7/16	1 1/16	1 13/16	1/4	12.6
3 B 68 SD	6.40	6.80	7.15	SD	A1	2	7/16	1 1/16	1 13/16	1/4	13.0
3 B 70 SK	6.60	7.00	7.35	SK	A1	2 5/8	—	1 1/16	1 15/16	9/16	14.0
3 B 74 SK	7.00	7.40	7.75	SK	A1	2 5/8	—	1 1/16	1 15/16	9/16	15.0
3 B 80 SK	7.60	8.00	8.35	SK	A1	2 5/8	—	1 1/16	1 15/16	9/16	16.0
3 B 86 SK	8.20	8.60	8.95	SK	A3	2 5/8	—	1 1/16	1 15/16	9/16	17.0
3 B 94 SK	9.00	9.40	9.75	SK	A3	2 5/8	—	1 1/16	1 15/16	9/16	18.0
3 B 110 SK	10.60	11.00	11.35	SK	A3	2 5/8	—	1 1/16	1 15/16	9/16	19.0
3 B 124 SK	12.00	12.40	12.75	SK	A3	2 5/8	—	1 1/16	1 15/16	9/16	22.0
3 B 136 SK	13.20	13.60	13.95	SK	A3	2 5/8	—	1 1/16	1 15/16	9/16	24.1
3 B 154 SK	15.00	15.40	15.75	SK	A3	2 5/8	—	1 1/16	1 15/16	9/16	28.0
3 B 160 SK	15.60	16.00	16.35	SK	A3	2 5/8	—	1 1/16	1 15/16	9/16	29.0
3 B 184 SK	18.00	18.40	18.75	SK	A3	2 5/8	—	1 1/16	1 15/16	9/16	37.0
3 B 200 SF	19.60	20.00	20.35	SF	D3	2 5/16	1/16	5/8	2 1/16	1/2	39.0
3 B 250 SF	24.60	25.00	25.35	SF	D3	2 5/16	1/16	5/8	2 1/16	1/2	67.0
3 B 300 SF	29.60	30.00	30.35	SF	D3	2 5/16	1/16	5/8	2 1/16	1/2	74.0
3 B 380 E	37.60	38.00	38.35	E	D3	3 1/2	1/4	5/8	2 5/8	1/8	122.0