


3V-5V-8V • CAST IRON SHEAVES




LEESON's series of taper bore V-pulleys are made of high-grade GG25 cast iron. They are matched with QTL "Quick Detachable" (QD) bushings for easy on-and-off use. These Narrow V-Belt sheaves offer higher horsepower than classical models and are suited to most power transmission installations.

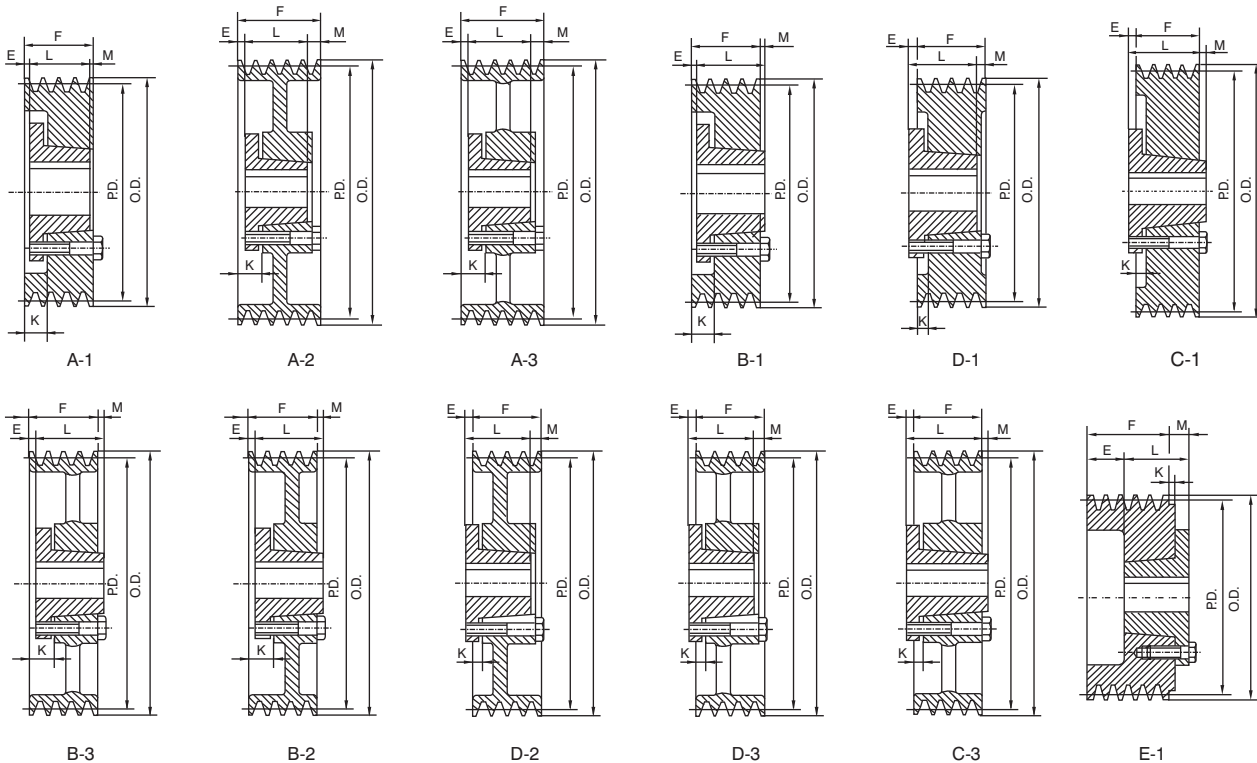


**NOMENCLATURE FOR TAPER-LOCK SHEAVES
FOR STANDARD NARROW V BELT**

2 - 3V 220 - JA

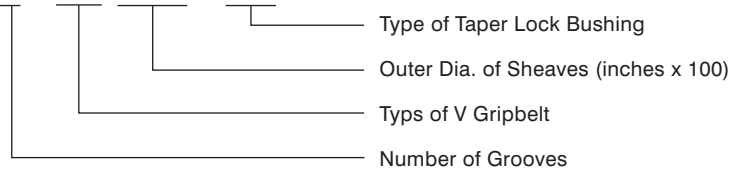

FOR QTL TAPER BUSHING - SEE PAGE 10

3V-5V-8V

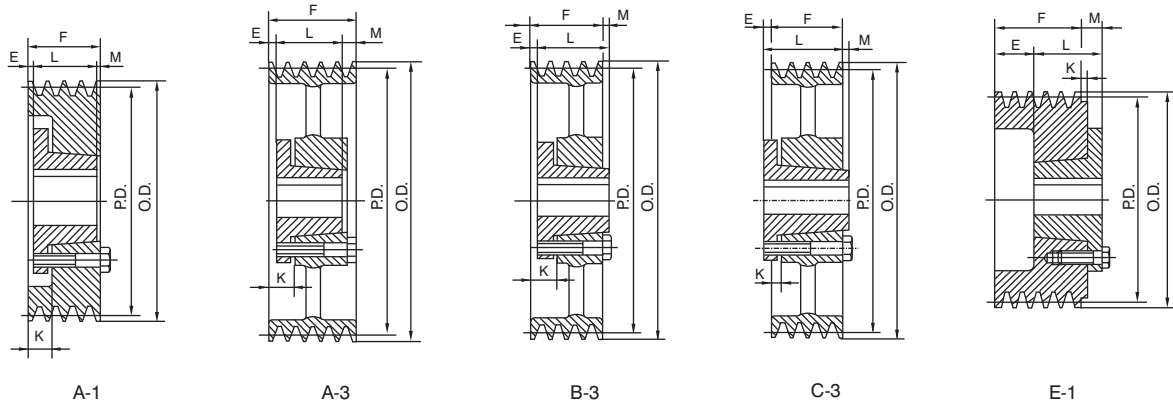

5V-6

F=4 7/16"(112.71mm)

Part No.	O.D.	PD.	Bush Max Bore	Bush	Type	Db	E	K	L	M	Wgt. Less Bush
6-5V440-SD	4.40	4.30	2	SD	E1	3/2	3/4	-	113/16	5/8	7.0
6-5V465-SD	4.65	4.55	2	SD	E1	3/2	3/4	-	113/16	5/8	7.8
6-5V490-SD	4.90	4.80	2	SD	A1	—	11/16	1 5/16	113/16	115/16	9.0
6-5V520-SD	5.20	5.10	2	SD	A1	—	11/16	1 5/16	113/16	115/16	10.8
6-5V550-SD	5.50	5.40	2	SD	A1	—	11/16	1 5/16	113/16	115/16	11.3
6-5V590-SK	5.90	5.80	25/8	SK	A1	—	5/8	1 5/16	115/16	17/8	12.0
6-5V630-SK	6.30	6.20	25/8	SK	A1	—	5/8	1 5/16	115/16	17/8	13.0
6-5V670-SF	6.70	6.60	215/16	SF	A1	—	15/16	1 5/8	21/16	17/16	14.0
6-5V710-SF	7.10	7.00	215/16	SF	A1	—	15/16	1 5/8	21/16	17/16	15.0
6-5V750-SF	7.50	7.40	215/16	SF	A1	—	15/16	1 5/8	21/16	17/16	17.0
6-5V800-E	8.00	7.90	31/2	E	A1	—	11/8	2	25/8	11/16	20.0
6-5V850-E	8.50	8.40	31/2	E	A1	—	11/8	2	25/8	11/16	25.0
6-5V900-E	9.00	8.90	31/2	E	A1	—	11/8	2	25/8	11/16	28.0
6-5V925-E	9.25	9.15	31/2	E	A1	—	11/8	2	25/8	11/16	29.0
6-5V975-E	9.75	9.65	31/2	E	A1	—	11/8	2	25/8	11/16	31.0
6-5V1030-E	10.30	10.20	31/2	E	A1	—	11/8	2	25/8	11/16	33.0
6-5V1090-E	10.90	10.80	31/2	E	A1	—	11/8	2	25/8	11/16	38.0
6-5V1130-E	11.30	11.20	31/2	E	A1	—	11/8	2	25/8	11/16	41.0
6-5V1180-E	11.80	11.70	31/2	E	A1	—	11/8	2	25/8	11/16	43.0
6-5V1250-F	12.50	12.40	315/16	F	B3	7	11/16	21/16	35/8	1/4	45.0
6-5V1320-F	13.20	13.10	315/16	F	B3	7	11/16	21/16	35/8	1/4	48.0
6-5V1400-F	14.00	13.90	315/16	F	B3	7	11/16	21/16	35/8	1/4	59.0
6-5V1500-F	15.00	14.90	315/16	F	B3	7	11/16	21/16	35/8	1/4	64.0
6-5V1600-F	16.00	15.90	315/16	F	B3	7	11/16	21/16	35/8	1/4	68.0
6-5V1870-F	18.70	18.60	315/16	F	A3	7	5/16	15/16	35/8	1/2	84.0
6-5V2120-F	21.20	21.10	315/16	F	A3	7	5/16	15/16	35/8	1/2	110
6-5V2360-J	23.60	23.50	41/2	J	B3	73/4	1/8	15/16	41/2	3/16	148
6-5V2800-J	28.00	27.90	41/2	J	B3	73/4	1/8	15/16	41/2	3/16	169
6-5V3150-J	31.50	31.40	41/2	J	B3	73/4	1/8	15/16	41/2	3/16	206
6-5V3750-J	37.50	37.40	41/2	J	B3	73/4	1/8	15/16	41/2	3/16	241
6-5V5000-M	50.00	49.90	51/2	M	C3	91/2	1/8	1/2	63/4	13/8	388

3V-5V-8V