Little GIANT®

RIM-U SERIES





The Ice Machine Replacement pumps are designed to meet virtually all manufacturer's specifications as OEM replacement pumps. These pumps feature a low pick-up, screened intake, removable parts for easy cleaning, NSF-listed ABS plastic base, impellers and discharge adaptors, a stainless steel motor shaft, sealed ball bearing motors, and are thermally protected for safety.


Features


- Removable parts for easy cleaning
- NSF-listed ABS base, impellers and discharge adaptors
- 115/230V, 4 lead wires, 3' in length
- Stainless steel shaft
- 1/25 HP motor with upper and lower sealed ball bearings
- Designed to meet manufacturer's specifications on virtually all ice machines
- Thermally protected
- Mounting bracket not supplied recommended use with original factory-installed mounting bracket

Construction

- Motor 1/25 HP
- Intermittent Liquid Temp. up to 120° F
- Discharge adaptors 1/2", 5/8", 3/4" and 1" I.D. tubing
- Y-adaptor included for 5/8" I.D. tubing
- Housing NSF-listed ABS
- Volute NSF-listed ABS
- Impellers NSF-listed ABS

RIM-U SERIES

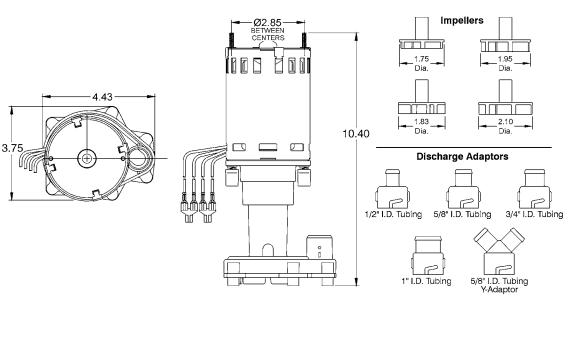



Specifications

Mode	el Item	-							Lead	Weight
No.	No.	Listings	HP	Discharge Size (in.)	Volts	Hertz	Amps	Watts	Wires (ft.)	(lb.)
RIM-	J 545600	EPH/cURus	1/25	1/2", 5/8", 3/4", 1", 5/8"Y O.D.	115/230	50/60	1.5/.75	125	3	4.31

Performance

		Flow - Gallons/Liters per hour			
Impeller	Discharge Adaptor (I.D.	2 Ft / .6m			
Diameter	Tubing Size)	GPH	LPH		
1.75" /	1/2" / 12.7mm	290	1097		
44.5 mm	5/8" / 15.8mm	435	1646		
4 5	3/4" / 19.1mm	540	2044		
6	1" / 24.5mm	585	2214		
	1/2" / 12.7mm	360	1362		
1.83" /	5/8" / 15.8mm	550	2081		
46.5 mm	3/4" / 19.1mm	700	2649		
	1" / 24.5mm	810	3066		
	1/2" / 12.7mm	385	1457		
1.95" /	5/8" / 15.8mm	600	2271		
49.5 mm	3/4" / 19.1mm	760	2876		
	1" / 24.5mm	825	3122		
	1/2" / 12.7mm	400	1514		
2.10" /	5/8" / 15.8mm	600	2271		
53.3 mm	3/4" / 19.1mm	700	2649		
	1" / 24.5mm	760	2876		

Replacement Parts

Item No.	Part No.	Description	Qty.
1	145463	Impeller/Adaptor Assembly Pack (4) Impeller sizes (5) Discharge adaptors (6) Volute thumb screws (1) Impeller spring (1) Impeller thumb screw (1) O-ring seal	1
2	145459	Stand	1
3	145461	Slinger plate	1
4	921073	Flat washer	2
5	921072	Locking washer	2
6	920026	Thumb nut (motor)	2
7	145460	Volute	1

