

New Product Notification




Formerly A. O. Smith Electrical Products Company

OEM REPLACEMENT MOTOR "For Hussman"



Stock No. OHS1004

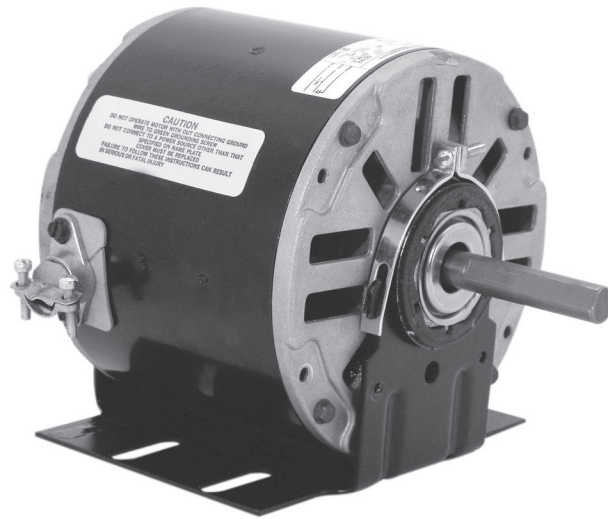

Features:

- High Efficient PSC Design*
- Sleeve Bearing
- Thermal Protection: Auto
- 40°C Ambient
- Single Phase
- 60 Hertz
- Insulation Class B
- Open, Air Over
- Resilient Base Mounted
- UL and CSA Approved
- See Reverse Side for Outline Drawing

Replacement for:

- GE 3011
- GE 5KSP39DG2221S
- GE 5KSP39DG4220AS

Stock No.	HP	Volts	Amps	RPM	Speeds	Frame	HZ	Rotation	Capacitor	Wt.
OHS1004	1/8	230	1.0	1550	1	48Y	60	CWLE	5MFD/370V	12

NOW AVAILABLE!
FAX OR PHONE YOUR ORDER TODAY!

Distribution Marketing
1325 Heil Quaker Blvd.
LaVergne, TN 37086
PH: 800-672-6495
FAX: 800-468-2062

www.centuryelectricmotor.com

©2012 Regal-Beloit Corporation Bulletin 6011 6/2012

A Regal Brand

REGAL

Stock No. OHS1004

Technical drawing of a mechanical part, showing front, top, and side views with dimensions and tolerances.

Front View (Top):

- Overall width: 5.74
- Overall height: 2.00
- Top flange width: 3.74
- Top flange thickness: .50 TYP.
- Bottom flange width: 1.16
- Bottom flange thickness: 1.16
- Bottom flange feature: USABLE FLAT
- Bottom flange hole diameter: DIA. .4998 (-.0005)
- Bottom flange hole position: 1.50 from right edge
- Bottom flange hole diameter: .453
- Bottom flange hole feature: FLAT

Top View (Left):

- Overall width: 6.00
- Overall height: 5.78
- Left flange width: 1.31
- Left flange thickness: 1.31
- Left flange feature: .34 SLOT (TYP.)
- Left flange hole diameter: .453
- Left flange hole feature: FLAT
- Left flange hole position: 2.89 from right edge
- Left flange hole diameter: .453
- Left flange hole feature: FLAT

Side View (Right):

- Overall width: 1.81
- Overall height: 4.38
- Top flange width: 1.31
- Top flange thickness: 1.31
- Top flange feature: .34 SLOT (TYP.)
- Top flange hole diameter: .453
- Top flange hole feature: FLAT
- Top flange hole position: 2.89 from right edge
- Top flange hole diameter: .453
- Top flange hole feature: FLAT